

 Kraus & Naimer **IRE**



Shortform

enclosed switches **switch** disconnectors



For free expert advice
call our sales team on

+353 61 704700

IRE 2026

krausnaimer.com

Short form

The Shortform Catalogue contains both our most popular enclosed switches (pages 4-30) and our best selling open switches switch disconnecter range (pages 31-47)

Kraus & Naimer's Blue Line products are accepted and universally recognised for their quality and workmanship.



Kraus & Naimer Limited is part of the worldwide Kraus & Naimer Group which celebrated its 115 year anniversary in 2022.

In 1963, Kraus & Naimer Limited was established as Ireland & UK sales and marketing company for Kraus & Naimer switchgear. By the early 70's successful growth meant a move to its current purpose-built premises in Newbury, from which it supplies over 3,000 customers with world-renowned, high quality Blue Line switchgear products.

Our key to success is the outstanding level of technical product support through our dedicated team of internal and external technical sales engineers. With many years experience, training and unbeatable product knowledge the team can find a solution for your switch applications.

 Kraus & Naimer

Enclosed Switches

Enclosed Isolators

Introducing NEW RANGE Functional handles & enclosures

see page 10

Main & Main/Emergency-Off Switch

Insulated enclosure	4-5
Painted steel enclosure	6-7
Stainless steel enclosure	8-9
Interlocked switch socket	11
Sloping roof stainless steel	12-13
GRP enclosure	14-15
GRP All-in-One	16
Insulated enclosure, EMC compliant connection	17

PV AC Switch-Disconnectors

Single & three phase	25 - 40A	18
----------------------	----------	----

PV DC Switch-Disconnectors

Single string & two string	11 - 50A up to 1000 VDC	19
----------------------------	-------------------------	----

Changeover Switch with Centre Off

Insulated, painted mild steel & stainless steel enclosure	20-21
GRP enclosure	22-23
Load Switch, painted mild steel	22-23

Main/Emergency-Off Switch + Emergency Stop Push Button

Insulated enclosure/painted steel enclosure/Stainless steel enclosure	24
---	----

Changeover Switch with Centre Off

Mains-Off Generator switch with appliance inlet, painted mild steel	25
---	----

Control Stations

Emergency Stop Push Button Station

Stainless steel enclosure	twist to reset, key operate to reset	26
Painted steel enclosure	twist to reset, key operate to reset	
Insulated enclosure	twist to reset, pull to reset palm/foot switch	

Emergency Stop Push Button Station with protective shroud

Stainless steel enclosure	twist to reset, key operate to reset	27
Painted steel enclosure	twist to reset, key operate to reset	
Insulated enclosure	twist to reset, pull to reset palm/foot switch	

Fire Alarm Isolator

Insulated enclosure - double pole 10A	27
---------------------------------------	----

Rotary Control Switch

Insulated enclosure off/on & changeover switches	28
--	----

Key Operated Control Switch

Insulated enclosure off/on, changeover & step switches	28
--	----

Load Switches

Emergency-Off Switch

Insulated enclosure 3 & 4 pole	25A & 32A	28
--------------------------------	-----------	----

Motor Reversing Switch

Insulated enclosure 3 phase/1 phase motors	28
--	----

Technical Data & Additional Information

Options & Additional Information	
Technical Data	29
IP rating information	30



Switch-disconnectors open switches (pages 31 - 47)

Main/emergency-off switch 20A - 315A



3, 4 & 6 POLE

**IP RATING** IP66/67 protection**ENCLOSURE** insulated polycarbonate grey (RAL7035)**HANDLE OPTION** red & yellow padlockable handle optional
black handle available**EARTH TERMINAL** included**SAFETY FEATURE** switch is interlocked with the lid to prevent opening in 'ON' position**ALSO AVAILABLE** 8 Pole

WITHOUT AUXILIARIES

Ie / AC-21A	3 Pole	Article No.	Encl. Ref	3 Pole + Solid Neutral (TP&N)	Article No.	Encl. Ref
20A	KG10.T203/GBA270.*KS1V	70050963	KSAV	KG10.T203/GBA355.*KS1V	70011636	KSAV
25A	KG20.T203/GBA270.*KS1V	70053688	KSAV	KG20.T203/GBA355.*KS1V	70053680	KSAV
32A	KG32.T203/GBA270.*KS1V	70055087	KSAV	KG32.T203/GBA355.*KS1V	70055089	KSAV
40A	KG41.T203/GBA270.*KL1V	70028993	KLCV	KG41.T203/GBA355.*KL1V	70055415	KLCV
63A	KG64.T203/GBA270.*KL1V	70055420	KLCV	KG64.T203/GBA355.*KL1V	70055421	KLCV
80A	KG80.T203/GBA270.*KL1V	70055095	KLDV	KG80.T203/GBA355.*KL1V	70054636	KLDV
100A	KG100.T203/GBA270.*KL1V	70042549	KLDV	KG100.T203/GBA355.*KL1V	70055022	KLDV
125A	KG105.T203/GBA270.*KL1V	70053863	KLDV	KG105.T203/GBA355.*KL1V	70067975	KLDV
125A ³⁾	KG125.T203/GBA270.*ST	70054649	ST3	KG125.T207/GBA355.*ST	70067977	ST3
160A	KG160.T203/GBA270.*ST	70067966	ST3	KG160.T207/GBA355.*ST	70067978	ST3
200A	KG210.T203/GBA270.*ST	70067972	ST3	KG210.T207/GBA355.*ST	70067980	ST4
250A	KG250.T203/GBA270.*ST	70054716	ST3	KG250.T207/GBA355.*ST	70067981	ST4
315A	KG315.T203/GBA270.*ST	70067973	ST3	KG315.T207/GBA355.*ST	70067983	ST4

WITH AUXILIARIES ¹

Ie / AC-21A	3 Pole + Aux	Article No.	Encl. Ref	3 Pole + Solid Neutral (TP&N) + Aux	Article No.	Encl. Ref
20A	KG10.T203/GBA281.*KS1V	70053682	KSAV	KG10.T203/GBA374.*KS1V	70067990	KSAV
25A	KG20.T203/GBA280.*KS1V	70055049	KSAV	KG20.T203/GBA373.*KS1V	70041855	KSAV
32A	KG32.T203/GBA280.*KS1V	70055088	KSAV	KG32.T203/GBA373.*KS1V	70067996	KSAV
40A	KG41.T203/GBA280.*KL1V	70053718	KLCV	KG41.T203/GBA373.*KL1V	70067998	KLCV
63A	KG64.T203/GBA280.*KL1V	70055094	KLCV	KG64.T203/GBA373.*KL1V	70068000	KLCV
80A	KG80.T203/GBA280.*KL1V	70055097	KLDV	KG80.T203/GBA373.*KL1V	70068020	KLDV
100A	KG100.T203/GBA280.*KL1V	70054638	KLDV	KG100.T203/GBA373.*KL1V	70068021	KLDV
125A	KG105.T203/GBA280.*KL1V	70054648	KLDV	KG105.T203/GBA373.*KL1V	70068026	KLDV
125A ³⁾	KG125.T203/GBA065.*ST	70055031	ST3	KG125.T207/GBA110.*ST	70068028	ST3
160A	KG160.T203/GBA065.*ST	70055041	ST3	KG160.T207/GBA110.*ST	70068030	ST3
200A	KG210.T203/GBA070.*ST	70055243	ST3	KG210.T207/GBA120.*ST	70068031	ST4
250A	KG250.T203/GBA070.*ST	70055383	ST3	KG250.T207/GBA120.*ST	70068032	ST4
315A	KG315.T203/GBA070.*ST	70054685	ST3	KG315.T207/GBA120.*ST	70068033	ST4

Notes



1) The following auxiliary contacts are provided:-
 KG10 3 to 6 pole 1 N.O. (early break) + 1 N.C.
 KG20 to KG105 3 to 6 pole 2 N.O. (early break)
 KG125 to KG315 3 to 6 pole 2 N.O. (early break) + 2 N.C.

2) Switched neutral pole is early make/late break.

3) KG125 suitable for applications requiring larger cable termination and increased enclosure size than a KG105.

DIMENSIONS (units = mm throughout the catalogue unless stated otherwise)

Encl. Ref.	Encl. Dim.			Encl. Dim.			Cable Entries.	Line Drg.
	H	W	D	H1	W1	d		
KSAV	120	85	90	110	-	4.2	4 x 20/25mm k'outs	Fig. 1
KLCV	190	100	93	178	-	5.6	4 x 20/25mm k'outs	Fig. 1
KLD	250	145	107	229	124	6.5	4 x 25/40mm k'outs	Fig. 2
KLDV	250	145	107	229	124	6.5	4 x 25/40mm k'outs	Fig. 2
STE	280	190	180	254	164	7	2 x gland plates	Fig. 2
ST2	280	190	130	254	164	7	2 x gland plates	Fig. 2
ST3	380	280	180	354	254	7	2 x gland plates	Fig. 2
ST4	560	380	180	534	354	7	2 x gland plates	Fig. 2

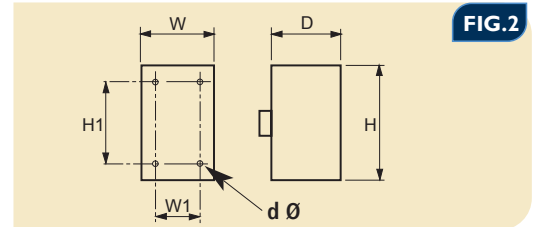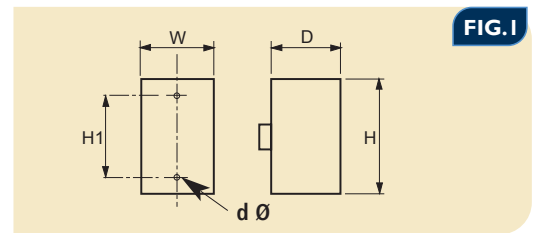

Please refer to Encl. Ref column in tables below for enclosure reference

4 Pole (3ph + Sw N²)		Article No.	Encl. Ref	6 Pole	Article No.	Encl. Ref	Ie / AC-21A
KG10.T204/GBA290.*KS1V		70053685	KSAV	KG10B.T206/GBA320.*KS1V	70055029	KSAV	20A
KG20.T204/GBA290.*KS1V		70029049	KSAV	KG20B.T206/GBA320.*KL1V	70053713	KLCV	25A
KG32.T204/GBA290.*KS1V		70011240	KSAV	KG32B.T206/GBA320.*KL1V	70054640	KLCV	32A
KG41.T204/GBA290.*KL1V		70036915	KLCV	KG41B.T206/GBA320.*KL1V	70040817	KLDV	40A
KG64.T204/GBA290.*KL1V		70028994	KLCV	KG64B.T206/GBA320.*KL1V	70054241	KLDV	63A
KG80.T204/GBA290.*KL1V		70028995	KLDV	KG80.T206/GBA967.*ST	70067987	STE	80A
KG100.T204/GBA290.*KL1V		70028986	KLDV	KG100.T206/GBA967.*ST	70067988	STE	100A
KG105.T204/GBA290.*KL1V		70055027	KLDV	KG105.T206/GBA967.*ST	70067995	STE	125A
KG125.T204/GBA290.*ST		70055385	ST3	KG125.T206/GBA967.*ST	70067991	ST4	125A ³⁾
KG160.T204/GBA290.*ST		70055449	ST3	KG160.T206/GBA967.*ST	70067993	ST4	160A
KG210.T204/GBA290.*ST		70067984	ST4				200A
KG250.T204/GBA290.*ST		70055235	ST4				250A
KG315.T204/GBA290.*ST		70067986	ST4				315A

4 Pole (3ph + Sw N²) + Aux		Article No.	Encl. Ref	6 Pole + Aux	Article No.	Encl. Ref	Ie / AC-21A
KG10.T204/GBA311.*KS1V		70053708	KSAV	KG10.T206/40.KS51V	70008385	KSAV	20A
KG20.T204/GBA310.*KS1V		70054540	KSAV	KG20B.T206/GBA330.*KL1V	70055086	KLCV	25A
KG32.T204/GBA310.*KS1V		70054000	KSAV	KG32B.T206/GBA330.*KL1V	70045708	KLCV	32A
KG41.T204/GBA310.*KL1V		70055419	KLCV	KG41B.T206/GBA330.*KL1V	70054567	KLDV	40A
KG64.T204/GBA310.*KL1V		70054060	KLCV	KG64B.T206/GBA330.*KL1V	70055485	KLDV	63A
KG80.T204/GBA310.*KL1V		70054555	KLDV	KG80.T206/GBA907.*ST	70055246	STE	80A
KG100.T204/GBA310.*KL1V		70054124	KLDV	KG100.T206/GBA907.*ST	70054639	STE	100A
KG105.T204/GBA310.*KL1V		70055234	KLDV	KG105.T206/GBA907.*ST	70068066	STE	125A
KG125.T204/GBA075.*ST		70055296	ST3	KG125.T206/GBA085.*ST	70055039	ST4	125A ³⁾
KG160.T204/GBA075.*ST		70055227	ST3	KG160.T206/GBA085.*ST	70055044	ST4	160A
KG210.T204/GBA080.*ST		70040618	ST4				200A
KG250.T204/GBA080.*ST		70055290	ST4				250A
KG315.T204/GBA080.*ST		70055289	ST4				315A



**GENEROUS
WIRING SPACE**

OFF-ON / SWITCH DISCONNECTORS

Main/emergency-off switch 20A - 315A



3, 4, 6, 9 & 12 POLE



IP RATING IP66 protection

ENCLOSURE grey paint finish (RAL7032)

HANDLE OPTION red & yellow padlockable handle
optional black handle available

EARTH TERMINAL included + lid bonding link

SAFETY FEATURE switch is interlocked with the lid to prevent opening in 'ON' position

ALSO AVAILABLE 9 & 12 Pole

WITHOUT AUXILIARIES

WITH AUXILIARIES ¹

Ie / AC-21A	3 Pole	Article No.	3 Pole + Solid Neutral (TP&N)	Article No.
20A	KG10.T203/GBA119.*MB2	70062175		
25A	KG20.T203/GBA119.*MB2	70062176	KG20.T207/GBA170.*MB2	70063733
32A	KG32.T203/GBA119.*MB2	70062177	KG32.T207/GBA170.*MB2	70063734
40A	KG41.T203/GBA109.*MB2	70062178	KG41.T207/GBA170.*MB2	70063736
63A	KG64.T203/GBA109.*MB2	70062179	KG64.T207/GBA170.*MB2	70063737
80A	KG80.T203/GBA109.*MB3	70062452	KG80.T207/GBA170.*MB3	70063738
100A	KG100.T203/GBA109.*MB3	70062239	KG100.T207/GBA170.*MB3	70063739
125A	KG105.T203/GBA109.*MB3	70062242	KG105.T207/GBA170.*MB3	70063741
125A ³⁾	KG125.T203/GBA109.MS8	70115937	KG125.T207/GBA170.MS8	70106416
160A	KG160.T203/GBA109.MS8	70115970	KG160.T207/GBA170.MS8	70107835
200A	KG210.T203/GBA109.MS9	70115971	KG210.T207/GBA170.MS9	70105424
250A	KG250.T203/GBA109.MS9	70116108	KG250.T207/GBA170.MS9	70105425
275A				
315A	KG315.T203/GBA109.MS9	70115969	KG315.T207/GBA170.MS9	70115972
Ie / AC-21A	3 Pole + Aux	Article No.	3 Pole + Solid Neutral (TP&N)+Aux	Article No.
20A	KG10.T203/GBA168.*MB2	70062251		
25A	KG20.T203/GBA169.*MB2	70062252	KG20.T207/GBA175.*MB2	70063749
32A	KG32.T203/GBA169.*MB2	70062263	KG32.T207/GBA175.*MB2	70063750
40A	KG41.T203/GBA159.*MB2	70062304	KG41.T207/GBA175.*MB2	70063751
63A	KG64.T203/GBA159.*MB2	70062305	KG64.T207/GBA175.*MB2	70063752
80A	KG80.T203/GBA159.*MB3	70062307	KG80.T207/GBA175.*MB3	70063755
100A	KG100.T203/GBA159.*MB3	70062308	KG100.T207/GBA175.*MB3	70063756
125A	KG105.T203/GBA159.*MB3	70062309	KG105.T207/GBA175.*MB3	70063757
125A ³⁾	KG125.T203/GBA165.MS8	70111885	KG125.T207/GBA180.MS8	70115973
160A	KG160.T203/GBA165.MS8	70108605	KG160.T207/GBA180.MS8	70115974
200A	KG210.T203/GBA175.MS9	70101214	KG210.T207/GBA185.MS9	70115975
250A	KG250.T203/GBA175.MS9	70110788	KG250.T207/GBA185.MS9	70115976
275A				
315A	KG315.T203/GBA175.MS9	70115921	KG315.T207/GBA185.MS9	70116113



Main switch (with larger enclosure) 250A -1250A

Ie / AC-21A	3 Pole + Aux	Article No.	3 Pole + Neutral Link + Aux	Article No.
250A	GB2.250/A.3011ST02.MS25	5514469	GB2.250/A.3111ST02.MS25	5514476
315A	GB2.315/A.3011ST02.MS26	5514470	GB2.315/A.3111ST02.MS26	5514477
400A	GB2.400/A.3011ST02.MS26	5514471	GB2.400/A.3111ST02.MS26	5514478
630A	GB2.630/A.3011ST02.MS27	5514472	GB2.630/A.3111ST02.MS27	5514479
800A	GB2.800/A.3011ST02.MS28	5514473	GB2.800/A.3111ST02.MS28	5514480
1000A	GB2.1000/A.3011ST02.MS28	5514474	GB2.1000/A.3111ST02.MS28	5514481
1250A	GB2.1250/A.3011ST02.MS28	5514475	GB2.1250/A.3111ST02.MS28	5514482

DIMENSIONS

Encl. Ref.	Encl. Dim.			Encl. Dim.			Cable Entries.		FIG
	H	W	D	H1	H2	W1	W2		
MB2	194	119	115	133	-	137	-	-	1
MB3	254	149	125	193	-	167	-	-	1
MB4	309	234	150	248	-	252	-	-	1
MS8	400	300	200	450	360	350	260	1 x gland plate	2
MS9	500	400	200	550	460	450	360	1 x gland plate	2
MS10	600	400	250	650	560	450	360	1 x gland plate	2
MS25	700	500	250	750	660	550	460	1 x gland plate	2
MS26	800	600	300	850	760	650	560	2 x gland plate	2
MS27	800	800	300	850	760	850	760	2 x gland plate	2
MS28	1000	800	300	1050	960	850	760	2 x gland plate	2

Please refer to end of part no. for enclosure reference. See tables below:

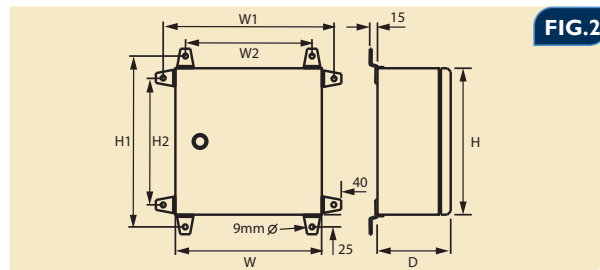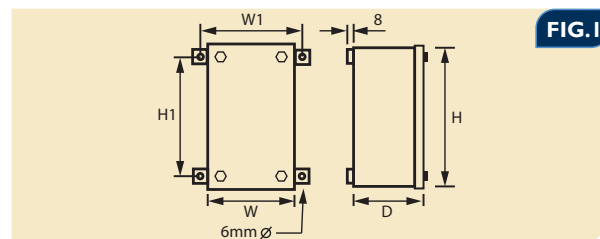

4 Pole (3ph + Sw N²)			Article No.	6 Pole			Article No.	Ie / AC-21A
KG10.T204/GBA219.*MB2			70062368			KG20B.T206/GBA309.*MB2	70062496	25A
KG20.T204/GBA219.*MB2			70062369			KG32B.T206/GBA309.*MB2	70062504	32A
KG32.T204/GBA219.*MB2			70062370			KG41B.T206/GBA309.*MB3	70062508	40A
KG41.T204/GBA209.*MB2			70062371			KG64B.T206/GBA309.*MB3	70062511	63A
KG64.T204/GBA209.*MB2			70062373			KG80.T206/GBA309.*MB4	70062514	80A
KG80.T204/GBA209.*MB3			70062374			KG100.T206/GBA309.*MB4	70062516	100A
KG100.T204/GBA209.*MB3			70062375			KG105.T206/GBA309.*MB4	70062518	125A
KG105.T204/GBA209.*MB3			70062376			KG125.T206/GBA309.MS9	70112564	125A ³⁾
KG125.T204/GBA209.MS8			70115926			KG160.T206/GBA309.MS9	70115928	160A
KG160.T204/GBA209.MS8			70103414			C200-4.T206/GBA309.MS10	70115931	200A
KG210.T204/GBA209.MS9			70110358					
KG250.T204/GBA209.MS9			70109612					
KG315.T204/GBA209.MS9			70115927			C316.T206/GBA309.MS10	70115929	275A
						C316.T206/GBA309.MS26	70115930	315A
4 Pole (3ph + Sw N²) + Aux			Article No.	6 Pole + Aux			Article No.	Ie / AC-21A
KG10.T204/GBA268.*MB2			70062382			KG20B.T206/GBA359.*MB2	70062660	20A
KG20.T204/GBA269.*MB2			70062385			KG32B.T206/GBA359.*MB2	70062665	25A
KG32.T204/GBA269.*MB2			70062386			KG41B.T206/GBA359.*MB3	70062666	32A
KG41.T204/GBA259.*MB2			70062388			KG64B.T206/GBA359.*MB3	70062669	40A
KG64.T204/GBA259.*MB2			70062389			KG80.T206/GBA359.*MB4	70062676	63A
KG80.T204/GBA259.*MB3			70062390			KG100.T206/GBA359.*MB4	70062678	80A
KG100.T204/GBA259.*MB3			70062391			KG105.T206/GBA359.*MB4	70062681	100A
KG105.T204/GBA259.*MB3			70062392			KG125.T206/GBA365.MS9	70115932	125A
KG125.T204/GBA265.MS8			70115922			KG160.T206/GBA365.MS9	70115933	125A ³⁾
KG160.T204/GBA265.MS8			70109614			C200-4.T206/GBA385.MS10	70115934	160A
KG210.T204/GBA275.MS9			70115923					200A
KG250.T204/GBA275.MS9			70115924					250A
KG315.T204/GBA275.MS9			70115925			C316.T206/GBA006.MS10	70115935	275A
						C316.T206/GBA365.MS26	70115936	315A

IP RATING IP65 with black & red padlockable handle

4 Pole + Aux			Article No.	AC-21A
GB2.250/A.4011ST02.MS25			5514483	250A
GB2.315/A.4011ST02.MS26			5514484	315A
GB2.400/A.4011ST02.MS26			5514485	400A
GB2.630/A.4011ST02.MS27			5514486	630A
GB2.800/A.4011ST02.MS28			5514487	800A
GB2.1000/A.4011ST02.MS28			5514488	1000A
GB2.1250/A.4011ST02.MS28			5514489	1250A

Notes

- The following auxiliary contacts are provided:-

KG10	1 N.O. (early break) + 1 N.C.
KG20 to KG105	2 N.O. (early break)
KG125 to KG315	2 N.O. (early break) + 2 N.C.
C316/C200-4	2 N.O. (early break)
GB2.250/A to GB2.1250/A	1 N.O. (early break) + 1 N.C.

- Switched neutral pole is early make/late break.

- KG125 suitable for applications requiring larger cable termination and increased enclosure size than KG105.

Main/emergency-off switch 20A - 315A



3, 4 & 6 POLE



IP RATING IP66 protection

ENCLOSURE brushed stainless steel, grade 304L

HANDLE OPTION red & yellow padlockable handle
optional black handle available

EARTH TERMINAL included + lid bonding link

FEATURE switch is interlocked with the lid to prevent opening in 'ON' position

WITHOUT AUXILIARIES

WITH AUXILIARIES ¹

le / AC-21A	3 Pole	Article No.	3 Pole + Solid Neutral (TP&N)	Article No.		
20A	KG10.T203/GBA419.*SB2	70062692				
25A	KG20.T203/GBA419.*SB2	70062690	KG20.T207/GBA420.*SB2	70063758		
32A	KG32.T203/GBA419.*SB2	70062694	KG32.T207/GBA420.*SB2	70063765		
40A	KG41.T203/GBA409.*SB2	70062698	KG41.T207/GBA420.*SB2	70063766		
63A	KG64.T203/GBA409.*SB2	70062699	KG64.T207/GBA420.*SB2	70063767		
80A	KG80.T203/GBA409.*SB3	70062700	KG80.T207/GBA420.*SB3	70063768		
100A	KG100.T203/GBA409.*SB3	70062701	KG100.T207/GBA420.*SB3	70063770		
125A	KG105.T203/GBA409.*SB3	70062704	KG105.T207/GBA420.*SB3	70063772		
125A ³⁾	KG125.T203/GBA409.SS8	70101089	KG125.T207/GBA420.SS8	70101091		
160A	KG160.T203/GBA409.SS8	70096122	KG160.T207/GBA420.SS8	70100942		
200A	KG210.T203/GBA409.SS9	70115938	KG210.T207/GBA420.SS9	70115958		
250A	KG250.T203/GBA409.SS9	70115939	KG250.T207/GBA420.SS9	70115959		
315A	KG315.T203/GBA409.SS9	70115940	KG315.T207/GBA420.SS9	70115960		
le / AC-21A	3 Pole + Aux	Article No.	3 Pole + Solid Neutral (TP&N) + Aux	Article No.		
20A	KG10.T203/GBA468.*SB2	70038454				
25A	KG20.T203/GBA469.*SB2	70062819	KG20.T207/GBA480.*SB2	70063821		
32A	KG32.T203/GBA469.*SB2	70062821	KG32.T207/GBA480.*SB2	70063822		
40A	KG41.T203/GBA459.*SB2	70062952	KG41.T207/GBA480.*SB2	70063823		
63A	KG64.T203/GBA459.*SB2	70062955	KG64.T207/GBA480.*SB2	70063825		
80A	KG80.T203/GBA459.*SB3	70062959	KG80.T207/GBA480.*SB3	70063826		
100A	KG100.T203/GBA459.*SB3	70062964	KG100.T207/GBA480.*SB3	70063830		
125A	KG105.T203/GBA459.*SB3	70062967	KG105.T207/GBA480.*SB3	70063831		
125A ³⁾	KG125.T203/GBA475.SS8	70100631	KG125.T207/GBA490.SS8	70115961		
160A	KG160.T203/GBA475.SS8	70104078	KG160.T207/GBA490.SS8	70115962		
200A	KG210.T203/GBA485.SS9	70106596	KG210.T207/GBA495.SS9	70115963		
250A	KG250.T203/GBA485.SS9	70094138	KG250.T207/GBA495.SS9	70115964		
315A	KG315.T203/GBA485.SS9	70115942	KG315.T207/GBA495.SS9	70115965		

Main switch (with larger enclosure)



250A -1250A

le / AC-21A	3 Pole + Aux	Article No.	3 Pole + Aux + Neutral Link	Article No.		
250A	GB2.250/A.3011ST02.SS25	5514490	GB2.250/A.3111ST02.SS25	5514497		
315A	GB2.315/A.3011ST02.SS26	5514454	GB2.315/A.3111ST02.SS26	5514498		
400A	GB2.400/A.3011ST02.SS26	5513608	GB2.400/A.3111ST02.SS26	5514499		
630A	GB2.630/A.3011ST02.SS27	5514493	GB2.630/A.3111ST02.SS27	5514500		
800A	GB2.800/A.3011ST02.SS28	5514494	GB2.800/A.3111ST02.SS28	5514501		
1000A	GB2.1000/A.3011ST02.SS28	5514495	GB2.1000/A.3111ST02.SS28	5514502		
1250A	GB2.1250/A.3011ST02.SS28	5514496	GB2.1250/A.3111ST02.SS28	5514503		

DIMENSIONS

Encl. Ref.	Encl. Dim.			Encl. Dim.				FIG
	H	W	D	H1	H2	W1	W2	
SB2	194	119	115	133	-	137	-	1
SB3	254	149	125	193	-	167	-	1
SB4	309	234	150	248	-	252	-	1
SS8	400	300	200	450	360	350	260	2
SS9	500	400	200	550	460	450	360	2
SS10	600	400	250	650	560	450	360	2
SS25	700	500	250	750	660	550	460	2
SS26	800	600	300	850	760	650	560	2
SS27	800	800	300	850	760	850	760	2
SS28	1000	800	300	1050	960	850	760	2

Please refer to end of part no. for enclosure reference. See tables below:

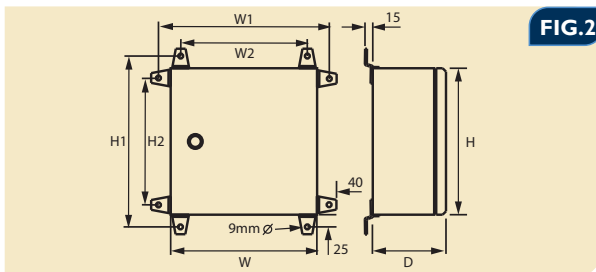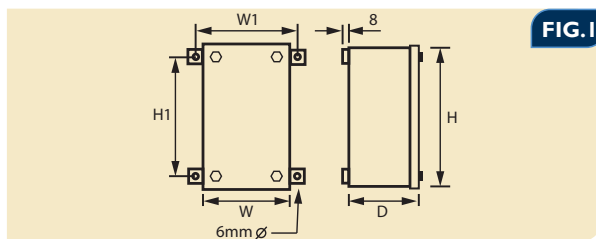

4 Pole (3ph + Sw N²)		Article No.	6 Pole		Article No.	Ie / AC-21A
KG10.T204/GBA519.*SB2		70062983		KG20B.T206/GBA609.*SB2	70063076	20A
KG20.T204/GBA519.*SB2		70063009		KG32B.T206/GBA609.*SB2	70063078	25A
KG32.T204/GBA519.*SB2		70063010		KG41B.T206/GBA609.*SB3	70063081	32A
KG41.T204/GBA509.*SB2		70063011		KG64B.T206/GBA609.*SB3	70063088	40A
KG64.T204/GBA509.*SB2		70063015		KG80.T206/GBA609.*SB4	70063089	63A
KG80.T204/GBA509.*SB3		70063016		KG100.T206/GBA609.*SB4	70063090	80A
KG100.T204/GBA509.*SB3		70063017		KG105.T206/GBA609.*SB4	70063092	100A
KG105.T204/GBA509.*SB3		70063018		KG125.T206/GBA609.SS9	70115946	125A ³⁾
KG125.T204/GBA509.SS8		70100830		KG160.T206/GBA609.SS9	70115947	125A ³⁾
KG160.T204/GBA509.SS8		70095578		C200-4.T206/GBA609.SS10	70115948	160A
KG210.T204/GBA509.SS9		70102154				200A
KG250.T204/GBA509.SS9		70095104				250A
KG315.T204/GBA509.SS9		70094652		C316.T206/GBA609.SS26	70115949	315A
4 Pole (3ph + Sw N²) + Aux		Article No.	6 Pole + Aux		Article No.	Ie / AC-21A
KG10.T204/GBA568.*SB2		70063027		KG20B.T206/GBA659.*SB2	70063097	20A
KG20.T204/GBA569.*SB2		70063029		KG32B.T206/GBA659.*SB2	70063098	25A
KG32.T204/GBA569.*SB2		70063030		KG41B.T206/GBA659.*SB3	70063099	32A
KG41.T204/GBA559.*SB2		70063031		KG64B.T206/GBA659.*SB3	70063100	40A
KG64.T204/GBA559.*SB2		70063032		KG80.T206/GBA659.*SB4	70063101	63A
KG80.T204/GBA559.*SB3		70063033		KG100.T206/GBA659.*SB4	70063128	80A
KG100.T204/GBA559.*SB3		70063034		KG105.T206/GBA659.*SB4	70063129	100A
KG105.T204/GBA559.*SB3		70063037		KG125.T206/GBA665.SS9	70109187	125A
KG125.T204/GBA565.SS8		70094904		KG160.T206/GBA665.SS9	70102514	125A ³⁾
KG160.T204/GBA565.SS8		70097056		C200-4.T206/GBA003.SS10	70115950	160A
KG210.T204/GBA575.SS9		70115943				200A
KG250.T204/GBA575.SS9		70115944				250A
KG315.T204/GBA575.SS9		70115945		C316.T206/GBA659.SS26	70115951	315A

IP RATING IP65 with black & red padlockable handle

4 Pole + Aux	Article No.	Ie / AC-21A
GB2.250/A.4011ST02.SS25	5514504	250A
GB2.315/A.4011ST02.SS26	5514505	315A
GB2.400/A.4011ST02.SS26	5514506	400A
GB2.630/A.4011ST02.SS27	5514507	630A
GB2.800/A.4011ST02.SS28	5514508	800A
GB2.1000/A.4011ST02.SS28	5514509	1000A
GB2.1250/A.4011ST02.SS28	5514510	1250A

Notes

- The following auxiliary contacts are provided:-
 KG10 1 N.O. (early break) + 1 N.C.
 KG20 to KG105 2 N.O. (early break)
 KG125 to KG315 2 N.O. (early break) + 2 N.C.
 C316/C200-4 2 N.O. (early break)
 GB2.250/A to GB2.1250/A 1 N.O. (early break) + 1 N.C.

- Switched neutral pole is early make/late break.

- KG125 suitable for applications requiring larger cable termination and increased enclosure size.

Functional handles & enclosures **NEW RANGE**

Customisable range




ENCLOSURES WITH SWITCH HOUSING FOR MACHINERY & INSTALLATION DOORS.

All functional enclosures are fully assembled ex works, ready for immediate use. Just two of the many variations available are shown below;


- **SERIES SE08**
- **IP67**

Switch enclosure made of stainless steel with piezo buttons and completely flat surface for easy cleaning.



- **SERIES FH04**
- **IP65**

Switch enclosures with bar handle for profile systems, made of aluminium with LED pushbutton (changeover), with/without emergency stop. 8 or 12 pole connection plug.

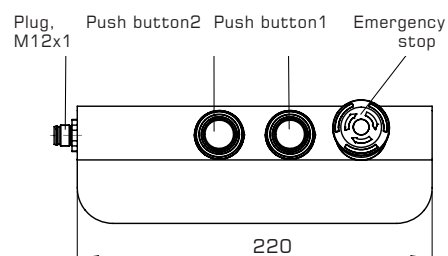

HANDLES WITH SWITCH HOUSING & FUNCTIONAL ELEMENTS

All functional handles are fully assembled ex works, the electronics are interconnected and ready for immediate use.

Whether the devices are part of the original design or retrofitted, they support your employees in important work processes and ensure security and functionality, e.g. in industry, logistics or in medical areas. For instance they can be used to allow access to perimeter protection.

Made with high-quality and robust materials, various connection options, pneumatic variants, individual button assignments, handle lengths and labels make these devices configurable all-rounders.

Contact us for more information on this range of products



CONFIGURABLE WITH :


- (illuminable) push buttons emergency stop
- variable lengths
- labelling & colour design
- LED lighting, membrane keypad

16A - 32A**Interlocked switch socket**

Sloping roof enclosure

IP RATING IP66 protection**ENCLOSURE** grade 304L brushed stainless steel sloping roof enclosure**HANDLE OPTION** IEC 60947 compliant red padlockable handle, padlockable in OFF**EARTH TERMINAL** included**SAFETY FEATURE** handle interlocked with the socket, preventing turning the isolator on when no plug is inserted and the removal of the plug while the socket is energised, ensuring safe operation.**2 & 4 POLE****DIMENSIONS**

Encl. Ref.	H	W	D
SRM	264	276	164

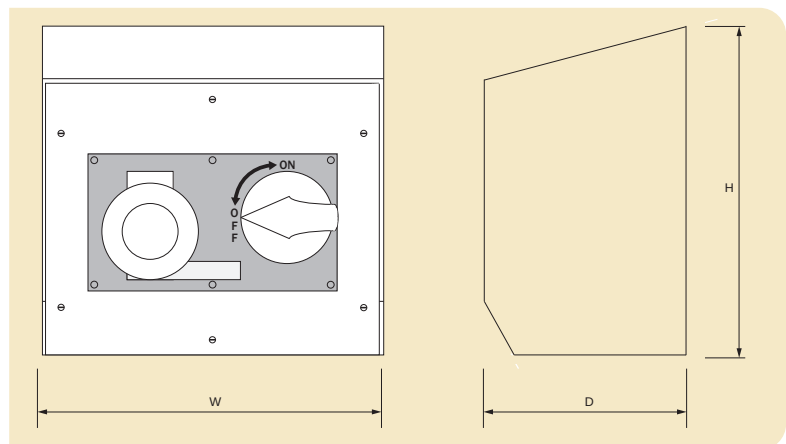

The Outlet socket;

for 2 Pole version is 2Pin +E

for 3 Pole version is 3Pin +E

for 4 Pole version is 4Pin +E

WITHOUT AUXILIARIES

Ie / AC-21A	2 Pole 230V	Article No.	3 Pole 400V	Article No.	4 Pole 400V	Article No.
16A	GB2.KH16.T202/GBA3P00.*SRM	5510048	GB2.KH16.T203/GBA4P00.*SRM	5510036	GB2.KH16.T204/GBA5P00.*SRM	5510037
32A	GB2.KH32.T202/GBA3P00.*SRM	5510049	GB2.KH32.T203/GBA4P00.*SRM	5510035	GB2.KH32.T204/GBA5P00.*SRM	5510034

WITH AUXILIARIES ¹

Ie / AC-21A	2 Pole (2 n.o. Aux) 230V	Article No.	3 Pole (2 n.o. Aux) 400V	Article No.	4 Pole (2 n.o. Aux) 400V	Article No.
16A	GB2.KH16.T202/GBA3P20.*SRM	5510047	GB2.KH16.T203/GBA4P20.*SRM	5510008	GB2.KH16.T204/GBA5P20.*SRM	5510090
32A	GB2.KF32.T202/GBA3P20.*SRM	5510094	GB2.KF32.T203/GBA4P20.*SRM	5510095	GB2.KF32.T204/GBA5P20.*SRM	5510096
Ie / AC-21A	2 Pole (1 n.o. + 1 n.c. Aux) 230V	Article No.	3 Pole (1 n.o. + 1 n.c. Aux) 400V	Article No.	4 Pole (1 n.o. + 1 n.c. Aux) 400V	Article No.
16A	GB2.KH16.T202/GBA3P11.*SRM	5510091	GB2.KH16.T203/GBA4P11.*SRM	5510092	GB2.KH16.T204/GBA5P11.*SRM	5510093
32A	GB2.KF32.T202/GBA3P11.*SRM	5510097	GB2.KF32.T203/GBA4P11.*SRM	5510098	GB2.KF32.T204/GBA5P11.*SRM	5510099

Main/emergency-off switch 25A - 125A



3, 3 + Neutral & 4 POLE

**IP RATING** IP65 protection**ENCLOSURE** brushed stainless steel, grade 304L with integral canopy**HANDLE OPTION** red & yellow padlockable handle optional black handle available**SAFETY FEATURE** switch is interlocked with the lid to prevent opening in 'ON' position**ADDITIONAL FEATURE** sloping roof

Ie / AC-21A	AC-23A	Encl. Ref.	3 Pole +2 N.O. Aux	Article No.	3 Pole + solid neutral +2 N.O. Aux	Article No.
25A	7.5kW	SR04	KG20.T203/GBA630.*SR04	70064996	KG20.T207/GBA640.*SR04	70065061
32A	11kW	SR04	KG32.T203/GBA630.*SR04	70064998	KG32.T207/GBA640.*SR04	70065066
25A ²⁾	7.5kW	SR14	KG20.T203/GBA601.*SR14	70064999	KG20.T207/GBA603.*SR14	70065106
32A ²⁾	11kW	SR14	KG32.T203/GBA601.*SR14	70065000	KG32.T207/GBA603.*SR14	70068084
40A	15kW	SR14	KG41.T203/GBA601.*SR14	70065002	KG41.T207/GBA603.*SR14	70068085
63A	22kW	SR14	KG64.T203/GBA601.*SR14	70065003	KG64.T207/GBA603.*SR14	70068087
80A	30kW	SR24	KG80.T203/GBA601.*SR24	70065004	KG80.T207/GBA603.*SR24	70068089
100A	37kW	SR24	KG100.T203/GBA601.*SR24	70065005	KG100.T207/GBA603.*SR24	70068091
125A	45kW	SR24	KG105.T203/GBA601.*SR24	70065006	KG105.T207/GBA603.*SR24	70068095

Main/emergency-off switch 25A - 125A

3, 3 + Neutral & 4 POLE

**IP RATING** IP65 protection**ENCLOSURE** brushed stainless steel, grade 304L, with integral canopy**HANDLE OPTION** red & yellow padlockable handle optional black handle available**SAFETY FEATURE** switch is interlocked with the lid to prevent opening in 'ON' position**ADD. FEATURE** sloping roof with welded mounting plate

Ie / AC-21A	AC-23A	Encl. Ref.	3 Pole +2 N.O. Aux	Article No.	3 Pole + solid neutral +2 N.O. Aux	Article No.
25A	7.5kW	SR04L	KG20.T203/GBA660.*SR04L	70068123	KG20.T207/GBA670.*SR04L	70068275
32A	11kW	SR04L	KG32.T203/GBA660.*SR04L	70068128	KG32.T207/GBA670.*SR04L	70068277
25A ²⁾	7.5kW	SR14L	KG20.T203/GBA601.*SR14L	70068129	KG20.T207/GBA603.*SR14L	70068278
32A ²⁾	11kW	SR14L	KG32.T203/GBA601.*SR14L	70068131	KG32.T207/GBA603.*SR14L	70068279
40A	15kW	SR14L	KG41.T203/GBA601.*SR14L	70068132	KG41.T207/GBA603.*SR14L	70068281
63A	22kW	SR14L	KG64.T203/GBA601.*SR14L	70068133	KG64.T207/GBA603.*SR14L	70068285
80A	30kW	SR24L	KG80.T203/GBA601.*SR24L	70068244	KG80.T207/GBA603.*SR24L	70068286
100A	37kW	SR24L	KG100.T203/GBA601.*SR24L	70068246	KG100.T207/GBA603.*SR24L	70068288
125A	45kW	SR24L	KG105.T203/GBA601.*SR24L	70068249	KG105.T207/GBA603.*SR24L	70068289


SLOPING ROOF - STAINLESS STEEL enclosure



DIMENSIONS

Encl. Ref.	Front Plate		Side View		
	H1	W1	D1	D2	H2
SR04	170	130	103	122	196
SR14	193	130	132	151	234
SR24	278	185	152	170	324

Please refer to the Encl. Ref. column in table below for enclosure reference:

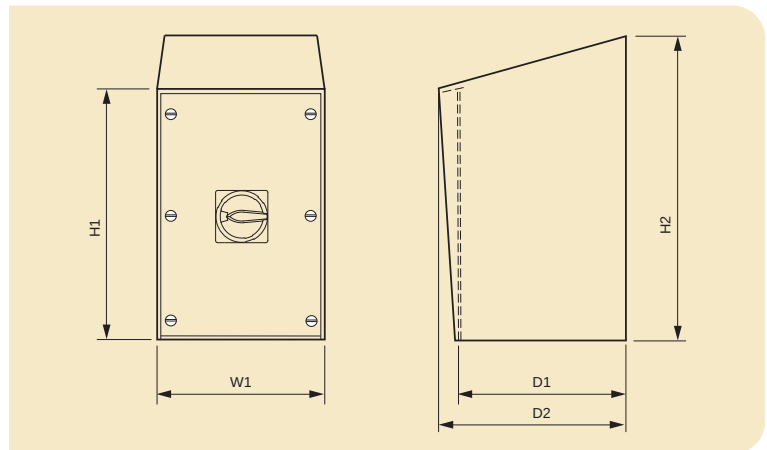

4 Pole (3ph + Sw N ¹) +2 N.O. Aux	Article No.	Ie / AC-21A
KG20.T204/GBA650.*SR04	70068098	25A
KG32.T204/GBA650.*SR04	70068102	32A
KG20.T204/GBA602.*SR14	70068106	25A ²⁾
KG32.T204/GBA602.*SR14	70068107	32A ²⁾
KG41.T204/GBA602.*SR14	70068109	40A
KG64.T204/GBA602.*SR14	70068114	63A
KG80.T204/GBA602.*SR24	70068116	80A
KG100.T204/GBA602.*SR24	70068118	100A
KG105.T204/GBA602.*SR24	70068119	125A


Note 1) Switched neutral pole is early make/late break.
2) Larger enclosure size (SR14)

DIMENSIONS


Encl. Ref.	Front View			
	H1	W1	W2	W3
SR04L	171	130	155	180
SR14L	209	130	155	180
SR24L	299	185	210	260

Encl. Ref.	Side View		
	H2	D1	D2
SR04L	196	104.2	123.2
SR14L	234	133.2	152.2
SR24L	324	153.2	171.2

Please refer to the Encl. Ref. column in table below for enclosure reference:

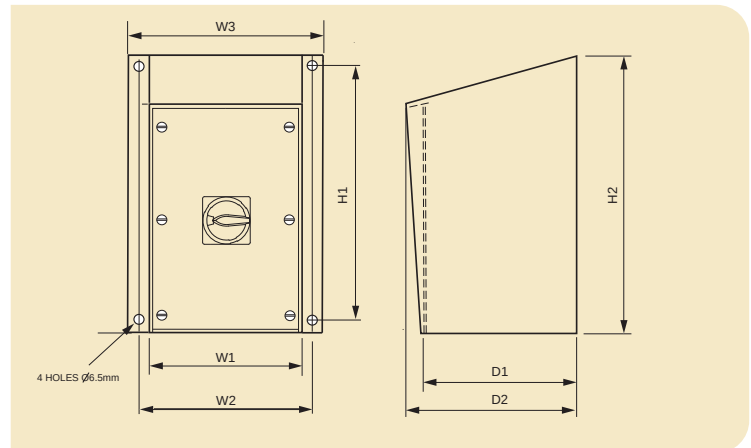

4 Pole (3ph + Sw N ¹) +2 N.O. Aux	Article No.	Ie / AC-21A
KG20.T204/GBA680.*SR04L	70068293	25A
KG32.T204/GBA680.*SR04L	70068294	32A
KG20.T204/GBA602.*SR14L	70068299	25A ²⁾
KG32.T204/GBA602.*SR14L	70068300	32A ²⁾
KG41.T204/GBA602.*SR14L	70068302	40A
KG64.T204/GBA602.*SR14L	70068304	63A
KG80.T204/GBA602.*SR24L	70068315	80A
KG100.T204/GBA602.*SR24L	70068322	100A
KG105.T204/GBA602.*SR24L	70068326	125A

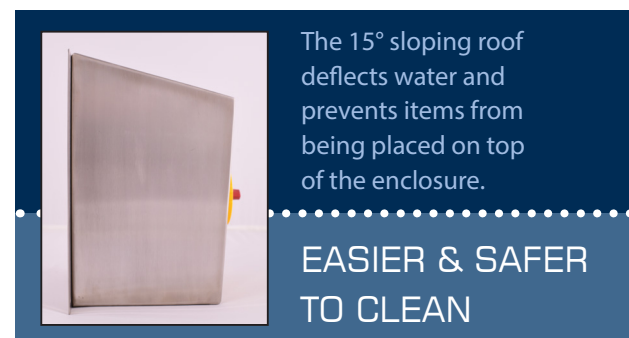

Note 1) Switched neutral pole is early make/late break.
2) Larger enclosure size (SR14L)

Main/emergency-off switch 25A - 315A



3, 4 & 6 POLE



IP & IK RATING IP66 + IK10 protection

ENCLOSURE GRP, grey RAL7035

HANDLE OPTION red & yellow padlockable handle
optional black handle available

EARTH TERMINAL included

SAFETY FEATURE switch is interlocked with the lid to prevent opening in 'ON' position

WITHOUT AUXILIARIES

le / AC-21A	AC-23A	3 Pole	Article No.	3 Pole + Solid Neutral (TP&N)	Article No.
25A	7.5kW	KG20.T203/GB00U2.*GP1	70063164	KG20.T207/GB00U2.*GP1	70063856
32A	11kW	KG32.T203/GB00U2.*GP1	70063165	KG32.T207/GB00U2.*GP1	70080274
40A	15kW	KG41.T203/GB00U2.*GP1	70063258	KG41.T207/GB00U2.*GP1	70075142
63A	22kW	KG64.T203/GB00U2.*GP1	70063268	KG64.T207/GB00U2.*GP1	70080275
80A	30kW	KG80.T203/GB00U2.*GP1	70063731	KG80.T207/GB00U2.*GP1	70075143
100A	37kW	KG100.T203/GB00U2.*GP1	70069955	KG100.T207/GB00U2.*GP1	70080277
125A	30kW	KG105.T203/GB00U2.*GP1	70075140	KG105.T207/GB00U2.*GP1	70075145
125A ³⁾	45kW	KG125.T203/GB00T2.*GP6	70063337	KG125.T207/GB00T2.*GP6	70063863
160A	55kW	KG160.T203/GB00T2.*GP6	70063339	KG160.T207/GB00T2.*GP6	70063864
200A	75kW	KG210.T203/GB00T1.*GP6	70063343	KG210.T207/GB00T1.*GP6	70063865
250A	90kW	KG250.T203/GB00T1.*GP6	70063344	KG250.T207/GB00T1.*GP6	70063868
315A	110kW	KG315.T203/GB00T1.*GP6	70063345	KG315.T207/GB00T1.*GP6	70063869

WITH AUXILIARIES ¹

le / AC-21A	AC-23A	3 Pole + Aux	Article No.	3 Pole + Solid Neutral (TP&N) + Aux	Article No.
25A	7.5kW	KG20.T203/GB20U2.*GP1	70086604	KG20.T207/GB20U2.*GP1.	70063870
32A	11kW	KG32.T203/GB20U2.*GP1	70073572	KG32.T207/GB20U2.*GP1	70063871
40A	15kW	KG41.T203/GB20U2.*GP1	70069680	KG41.T207/GB20U2.*GP1	70075183
63A	22kW	KG64.T203/GB20U2.*GP1	70075179	KG64.T207/GB20U2.*GP1	70075184
80A	30kW	KG80.T203/GB20U2.*GP1	70075180	KG80.T207/GB20U2.*GP1	70075185
100A	37kW	KG100.T203/GB20U2.*GP1	70077449	KG100.T207/GB20U2.*GP1	70075225
125A	30kW	KG105.T203/GB20U2.*GP1	70075181	KG105.T207/GB20U2.*GP1	70063876
125A ³⁾	45kW	KG125.T203/GB22T2.*GP6	70063384	KG125.T207/GB22T2.*GP6	70063953
160A	55kW	KG160.T203/GB22T2.*GP6	70063385	KG160.T207/GB22T2.*GP6	70063954
200A	75kW	KG210.T203/GB22T1.*GP6	70063386	KG210.T207/GB22T1.*GP6	70063958
250A	90kW	KG250.T203/GB22T1.*GP6	70063387	KG250.T207/GB22T1.*GP6	70063961
315A	110kW	KG315.T203/GB22T1.*GP6	70063388	KG315.T207/GB22T1.*GP6	70063963


OPTIONS CAN INCLUDE :

- terminal blocks
- lid mounted push buttons & pilot lights
- emergency stop push button
- lockable door
- defeatable door interlock

DIMENSIONS

Encl. Ref.	A	B	C	D	E	F	G
GP1	300	265	165	222	316	354	184
GP3	425	325	180	348	377	480	245
GP6	500	430	210	423	485	555	353
GP23	650	540	260	573	594	705	462
GP27	805	615	315	723	665	855	533

Please refer to end of part no. for enclosure reference.
See tables below:

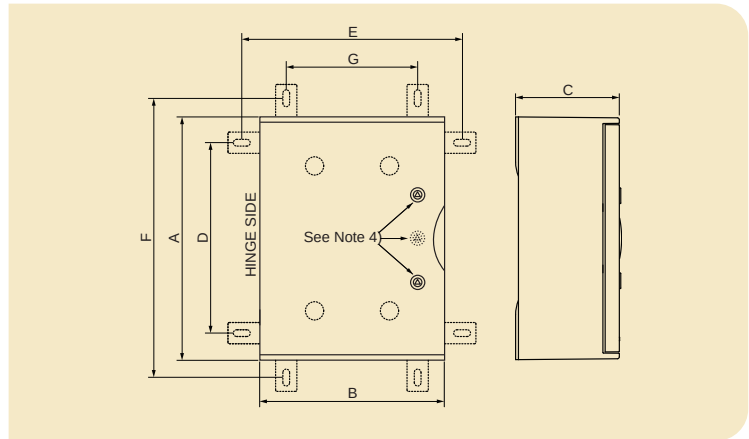

4 Pole (3ph + Sw N ²)		Article No.	6 Pole		Article No.	le / AC-21A
KG20.T204/GB00U2.*GP1		70063407	KG20B.T206/GB00U2.*GP1		70075161	25A
KG32.T204/GB00U2.*GP1		70063410	KG32B.T206/GB00U2.*GP1		70075163	32A
KG41.T204/GB00U2.*GP1		70075147	KG41B.T206/GB00U2.*GP1		70075164	40A
KG64.T204/GB00U2.*GP1		70075148	KG64B.T206/GB00U2.*GP1		70075166	63A
KG80.T204/GB00U2.*GP1		70075157	KG80.T206/GB00U2.*GP3		70073757	80A
KG100.T204/GB00U2.*GP1		70069957	KG100.T206/GB00U2.*GP3		70073535	100A
KG105.T204/GB00U2.*GP1		70075159	KG105.T206/GB00U2.*GP3		70075170	125A
KG125.T204/GB00T2.*GP6		70063426	KG125.T206/GB00T2.*GP6		70063526	125A ³⁾
KG160.T204/GB00T2.*GP6		70063473	KG160.T206/GB00T2.*GP6		70063528	160A
KG210.T204/GB00T1.*GP6		70063479	C200-4.T206/GB00T1.*GP23		70063530	200A
KG250.T204/GB00T1.*GP6		70063481				250A
KG315.T204/GB00T1.*GP6		70063486	C316.T206/GB00T1.*GP27		70063531	315A

4 Pole (3ph + Sw N ²) + Aux		Article No.	6 Pole + Aux		Article No.	le / AC-21A
KG20.T204/GB20U2.*GP1		70063504	KG20B.T206/GB20U2.*GP1		70063546	25A
KG32.T204/GB20U2.*GP1		70135121	KG32B.T206/GB20U2.*GP1		70073559	32A
KG41.T204/GB20U2.*GP1		70075227	KG41B.T206/GB20U2.*GP1		70063550	40A
KG64.T204/GB20U2.*GP1		70075230	KG64B.T206/GB20U2.*GP1		70063551	63A
KG80.T204/GB20U2.*GP1		70075239	KG80.T206/GB20U2.*GP3		70073752	80A
KG100.T204/GB20U2.*GP1		70072836	KG100.T206/GB20U2.*GP3		70073570	100A
KG105.T204/GB20U2.*GP1		70075243	KG105.T206/GB20U2.*GP3		70075246	125A
KG125.T204/GB22T2.*GP6		70063512	KG125.T206/GB22T2.*GP6		70063557	125A ³⁾
KG160.T204/GB22T2.*GP6		70063514	KG160.T206/GB22T2.*GP6		70063558	160A
KG210.T204/GB22T1.*GP6		70063516	C200-4.T206/GB22T1.*GP23		70063559	200A
KG250.T204/GB22T1.*GP6		70063517				250A
KG315.T204/GB22T1.*GP6		70063518	C316.T206/GB22T1.*GP27		70068331	315A

Notes

- The following auxiliary contacts are provided:-
KG20 to KG105 2 N.O. (early break)
KG125 to KG315 2 N.O. (early break) + 2 N.C.
C200-4 & C316 2 N.O. (early break)
- Switched neutral pole is early make/late break.
- KG125 suitable for applications requiring larger cable termination and increased enclosure size.
- GP1 enclosures have 1 quarter turn lock. GP3, GP6, GP23 & GP27 enclosures have 2 quarter turn locks.

Main/emergency-off switch


25A - 315A



3, 4 & 6 POLE

**IP& IK RATING** IP66 + IK10 protection**ENCLOSURE** GRP, grey (RAL7035) or red (RAL3000)**HANDLE OPTION** red & yellow padlockable handle optional black handle available**EARTH TERMINAL** included**FEATURE** key lockable hinged lid, with interlock to prevent opening in the "ON" position

ALL IN ONE SOLUTION

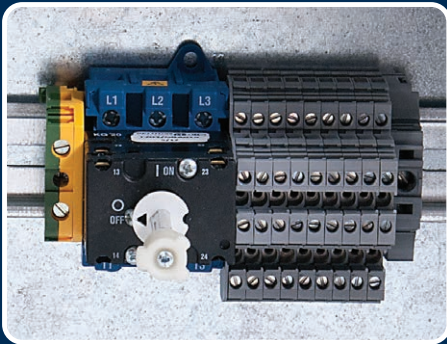

COMBINE A NUMBER OF DIFFERENT SWITCHES & DEVICES IN ONE ENCLOSURE

Kraus & Naimer offer a standard range of rotary isolators and changeover switches in GRP enclosures ranging from 25A to 315A, from 3 - 6 Pole and can also offer a variety of different fitted options from stock.

- Faster & safer installation
- Maximum flexibility
- Cost effective

Please contact us to discuss your exact requirements. Our team are highly trained and ready to help with any technical questions you may have.




20A - 315A EMC compliant connection

- IP RATING** IP66/67 protection
- ENCLOSURE** grey insulated
- HANDLE OPTION** red and yellow padlockable handle
optional black handle available
- FEATURES** interlocked lid
- integral metal plate to maintain cable screen continuity between input and output cables.
- Screen termination by spring clamp (KG10-KG100)
or screw clamp (KG125 - KG315).
- Connections for screened control cables also available





3, & 6 POLE

Screen Cable Dimensions (mm)	
KG10	8 - 11
KG20, KG32, KG20B, KG32B	11 - 17
KG41, KG64	11 - 17
KG41B, KG64B	22 - 30
KG80, KG100	22 - 30
KG80C, KG100C	28 - 34
KG125 - KG250	34 - 40
KG315	46 - 52

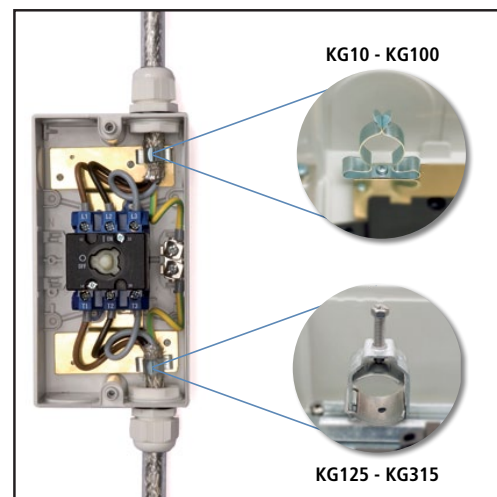

DIMENSIONS

Encl. Ref.	Encl. Dim. H W D			Encl. Dim. H1 W1 d			Line Drg.
KS51V	120	85	90	110	-	4.2	Fig. 1
KL51V	160	85	82	150	-	5.6	Fig. 1
KL11V	190	100	93	178	-	5.6	Fig. 1
KL71V	250	145	107	229	124	6.5	Fig. 2
STM3 (3 Pole)	560	280	180	534	254	7	Fig. 2
STM6 (6 Pole)	560	380	180	534	354	7	Fig. 2

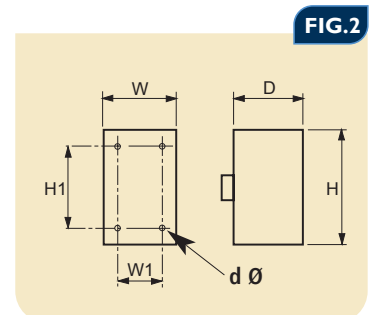

Please refer to the Encl. Ref. column in table below for enclosure reference:

le / AC-21A	AC-23A	3 Pole + 1 n/o + 1 n/c Aux	Article No.	Encl. Ref	6 Pole + 1 n/o + 1 n/c Aux	Article No.	Encl. Ref
20A	5.5kW	KG10.T203/D-A076.KS51V	70008610	KS51V			
25A	7.5kW	KG20.T203/D-A159.KL51V	70011109	KL51V	KG20B.T206/D-A059.KL11V	70011049	KL11V
32A	11kW	KG32.T203/D-A117.KL51V	70010424	KL51V	KG32B.T206/D-A054.KL11V	70011051	KL11V
40A	15kW	KG41.T203/D-A145.KL11V	70011035	KL11V	KG41B.T206/D-A052.KL11V	70029381	KL71V
63A	22kW	KG64.T203/D-A173.KL11V	70010412	KL11V	KG64B.T206/D-A066.KL11V	70019521	KL71V
80A	30kW	KG80.T203/D-A108.KL71V	70010474	KL71V	KG80C.T206/D-A070.STM	70022583	STM6
100A	37kW	KG100.T203/D-A120.KL71V	70011306	KL71V	KG100C.T206/D-A060.STM	70022584	STM6
125A	45kW	KG125.T203/D-A082.STM	70021607	STM3	KG125.T206/D-A020.STM	70022585	STM6
160A	55kW	KG160.T203/D-A077.STM	70011325	STM3	KG160.T206/D-A040.STM	70022587	STM6
250A	90kW	KG250.T203/D-A075.STM	70015149	STM3			
315A	110kW	KG315.T203/D-A034.STM	70010413	STM3			

AC Switch disconnectors 25 - 40A



single & three phase
AC-21A



IP RATING IP66/67 protection

ENCLOSURE grey insulated (RAL7035)

HANDLE OPTION red/yellow padlockable handle,
optional black/grey available

EARTH TERMINAL included

FEATURE switch interlocked with lid to prevent
opening in 'ON' position





AC Switch Disconnectors - for Single Phase

Current Rating AC-21A (per contact)	Order Code No.	Article No.	FIG.
25A	KG20.T203/GBA270.*KS1V	70053688	FIG 4
25A	KG20.T203/GBA294.*KL ¹⁾	70028990	FIG 1
32A	KG32.T203/GBA294.*KL ¹⁾	70055409	FIG 1
40A	KG41.T203/GBA270.*KL1V	70028993	FIG 2

AC Switch Disconnectors - for Three Phase (3ph + Sw N²⁾)

Current Rating AC-21A (per contact)	Order Code No.	Article No.	FIG.
25A	KG20.T204/GBA290.*KS1V	70029049	FIG 4
25A	KG20.T204/GBA486.KL51V ¹⁾	70028991	FIG 1
32A	KG32.T204/GBA486.KL51V ¹⁾	70028992	FIG 1
40A	KG41.T204/GBA290.*KL1V	70036915	FIG 2

¹⁾ Larger enclosure to match KG20/32 T104 DC enclosure ²⁾ Switched neutral pole is early make / late break.

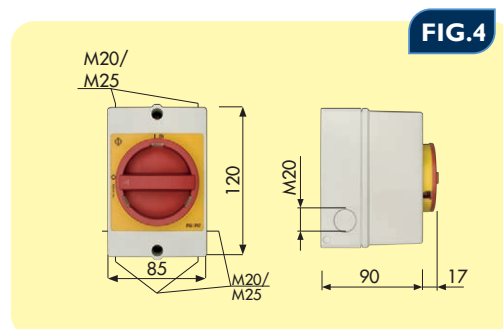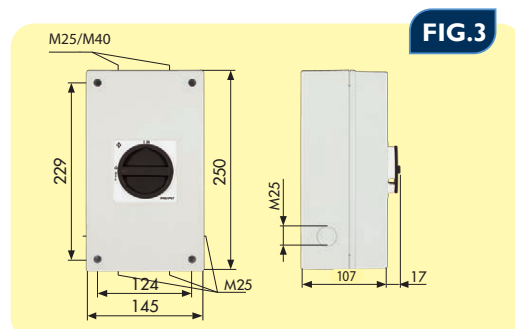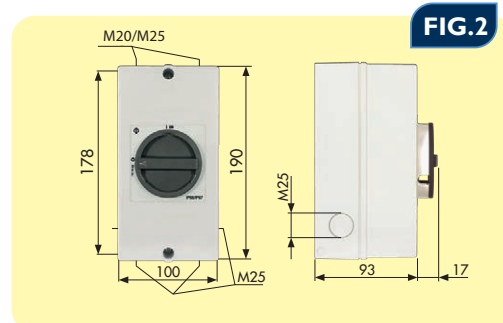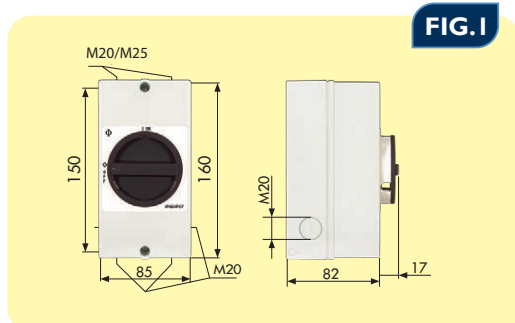

up to 50A @ 220 -1000V

DC Switch disconnectors

IP RATING IP66/67 protection**ENCLOSURE** grey insulated (RAL7035)**HANDLE OPTION** black/grey padlockable handle,
with option for red/yellow handle

FEATURES switch is interlocked with the lid to
prevent opening in 'ON' position
class II compliant
rated for use in ambient temperatures up to 50°C
non-polarity sensitive

KG40 - up to 50 amps @1000 VDC to give higher rating achieved by use of
permanent magnets in the contact body used to reduce arcing time

single & two string
DC-21B

Single String DC Switch Disconnectors - Selection Chart DC-21B (DC-PV1)

Voltage													Order Code No.	Article No.	FIG.	
250V	375V	400V	450V	500V	600V	650V	660V	750V	800V	850V	920V	1000V			FIG. 1	FIG. 2
25A	25A	25A	25A	21A	20A	20A	18A	18A	18A	11A	11A		KG20.T104/D-P003.KL51V	70028988		
					25A	25A	23A	23A	23A	15A	15A	12A	KG32.T104/D-P003.KL51V	70030919		
50A	40A	40A	30A	30A									KG40.TD102/D-P003.KL11V	70031025		
	50A		40A	40A	40A	30A	30A	30A		20A	20A	20A	KG40.TD103/D-P003.KL11V	70031026		
		50A	50A	50A		40A	40A	40A	40A	30A	30A	30A	KG40.TD104/D-P003.KL11V	70031028		
					50A	50A	50A	50A		40A	40A	40A	KG40B.TD106/D-P003.KL11V	70031029		
									50A	50A	50A	50A	KG40B.TD108/D-P003.KL11V	70031031		

SINGLE STRING

Two String DC Switch Disconnectors - Selection Chart DC-21B (DC-PV1)

Ratings Per String (220V - 500V)											Order Code No.	Article No.	FIG.	
220V	250V	280V	330V	340V	375V	400V	420V	440V	460V	500V			FIG. 1	FIG. 2
25A	21A	21A	20A	20A	18A	18A	11A	11A	11A		KG20.T104/GB-P103.KL51V	70028989		
28A	28A	28A	25A	25A	23A	23A	15A	15A	15A	12A	KG32.T104/GB-P103.KL51V	70030920		
50A	50A	40A	40A	40A	40A	40A	30A	30A	30A	30A	KGD40.TD104/D-P004.KL11V	70031027		
		50A	50A	50A	50A		40A	40A	40A	40A	KGD40B.TD106/D-P004.KL11V	70031030		
						50A	50A	50A	50A	50A	KGD40B.TD108/D-P004.KL11V	70031032		
Ratings Per String (510V - 1000V)											Order Code No.	Article No.	FIG.	
510V	560V	600V	660V	680V	690V	750V	800V	920V	1000V				FIG. 2	FIG. 3
20A	20A	20A	20A	12A	12A	12A	12A	8A	8A		KGD40.TD104/D-P004.KL11V	70031027		
25A	23A	23A		15A	15A						KG32B.T106/GB-P103.KL11V	70030795		
				20A	18A	18A	18A	11A			KG20B.T108/GB-P103.KL11V	70068395		
40A	40A	40A	30A	30A	30A	30A	20A	20A	20A		KGD40B.TD106/D-P004.KL11V	70031030		
			40A	40A	40A	40A	40A	30A	30A		KGD40B.TD108/D-P004.KL11V	70031032		

TWO STRING

TWO STRING

Please select the switch disconnecter according to the maximum voltage and current output of all upstream PV modules, this must include all corrective factors according to relevant standards. **DC-PV2** ratings available on request.

Changeover switch with centre off 16A - 160A



2, 3 & 4 POLE



INSULATED

- IP66/67 protection
- auxiliary contacts provided with 3 & 4 pole switches
- black & red handle, padlockable in 'OFF' position
- earth terminal
- grey insulated enclosed (RAL7035)
- switch interlocked with lid to prevent opening in 'ON' position

Ie / AC-21A	2 Pole	Article No.	Encl. Ref		
16A	KH16.T902/GBA002.*KS52	70055494	KSA		
20A	KH20.T902/GBA002.*KS52	70055486	KSA		
25A	KH25.T902/GBA002.*KS52	70031001	KSA		
32A	KH32.T902/GBA002.*KL12	70055196	KLC		
40A	KH40.T902/GBA002.*KL12	70054174	KLC		
63A	KH63.T902/GBA002.*KL72	70053809	KLE		
80A	KH80.T902/GBA002.*KL72	70055506	KLE		
100A	KH85.T902/GBA012.*KL72	70054210	KLE		
125A					
125A ³⁾					
160A					

2, 3 & 4 POLE



MILD STEEL

- IP66 protection
- auxiliary contacts provided with 3 & 4 pole switches
- black & red handle, padlockable in 'OFF' position
- earth terminal & lid bonding link included
- grey powder paint finish (RAL7032) also available in red powder paint finish (RAL3000)
- switch interlocked with lid to prevent opening in 'ON' position

Ie / AC-21A	2 Pole	Article No.	Encl. Ref		
16A	KH16.T902/GBA020.*MB2	70063562	MB2		
20A	KH20.T902/GBA020.*MB2	70063565	MB2		
25A	KH25.T902/GBA020.*MB2	70063564	MB2		
32A	KH32.T902/GBA020.*MB2	70063567	MB2		
40A	KH40.T902/GBA020.*MB2	70063568	MB2		
63A	KH63.T902/GBA020.*MB3	70063569	MB3		
80A	KH80.T902/GBA020.*MB3	70063570	MB3		
100A	KH85.T902/GBA020.*MB3	70063572	MB3		
125A					
125A ³⁾					
160A					

2, 3 & 4 POLE



STAINLESS STEEL

- IP66 protection
- auxiliary contacts provided with 3 & 4 pole switches
- black & red handle, padlockable in 'OFF' position
- earth terminal & lid bonding link included
- stainless steel enclosure, grade 316L (SS9) grade 304L
- switch interlocked with lid to prevent opening in 'ON' position

Ie / AC-21A	2 Pole	Article No.	Encl. Ref		
16A	KH16.T902/GBA025.*SB2	70063592	SB2		
20A	KH20.T902/GBA025.*SB2	70063593	SB2		
25A	KH25.T902/GBA025.*SB2	70063594	SB2		
32A	KH32.T902/GBA025.*SB2	70063596	SB2		
40A	KH40.T902/GBA025.*SB2	70063598	SB2		
63A	KH63.T902/GBA025.*SB3	70063599	SB3		
80A	KH80.T902/GBA025.*SB3	70063601	SB3		
100A	KH85.T902/GBA025.*SB3	70063603	SB3		
125A					
125A ³⁾					
160A					

Notes

1) 2-off electrically isolated early break auxiliary contacts are provided with the 3 & 4 pole switches. One of these contacts closes in position 1 and the other contact closes in position 2. Both of the contacts are open in the Off position.

2) Switched neutral pole is early make/late break.

3) KG125 suitable for applications requiring larger cable termination and increased enclosure size than the KG105.



It's time for a changeover to Kraus & Naimer

DIMENSIONS






3 Pole ¹⁾	Article No.	Encl. Ref	4 Pole (3ph+Sw N ²⁾ ¹⁾	Article No.	Encl. Ref
KG20B.T903/GBA013.*KL	70054664	KLC	KG20B.T904/GBA014.*KL	70054624	KLD
KG32B.T903/GBA013.*KL	70054593	KLC	KG32B.T904/GBA014.*KL	70054223	KLD
KG41B.T903/GBA013.*KL	70054721	KLD	KG41B.T904/GBA004.*ST	70054691	ST2
KG64B.T903/GBA013.*KL	70054594	KLD	KG64B.T904/GBA004.*ST	70054538	ST2
KG80.T903/GBA013.*ST	70054643	STE	KG80.T904/GBA004.*ST	70054644	ST3
KG100.T903/GBA013.*ST	70054647	STE	KG100.T904/GBA004.*ST	70055024	ST3
KG105.T903/GBA013.*ST	70068347	STE	KG105.T904/GBA004.*ST	70054679	ST3
KG125.T903/GBA035.*ST	70054713	ST4	KG125.T904/GBA045.*ST	70054714	ST4
KG160.T903/GBA035.*ST	70055047	ST4	KG160.T904/GBA045.*ST	70068348	ST4

3 Pole ¹⁾	Article No.	Encl. Ref	4 Pole (3ph+Sw N ²⁾ ¹⁾	Article No.	Encl. Ref
KG20B.T903/GBA030.*MB3	70063574	MB3	KG20B.T904/GBA040.*MB3	70063583	MB3
KG32B.T903/GBA030.*MB3	70063575	MB3	KG32B.T904/GBA040.*MB3	70063584	MB3
KG41B.T903/GBA030.*MB3	70063658	MB3	KG41B.T904/GBA040.*MB3	70063586	MB3
KG64B.T903/GBA030.*MB3	70063577	MB3	KG64B.T904/GBA040.*MB3	70063587	MB3
KG80.T903/GBA030.*MB4	70063578	MB4	KG80.T904/GBA040.*MB4	70063588	MB4
KG100.T903/GBA030.*MB4	70063579	MB4	KG100.T904/GBA040.*MB4	70063589	MB4
KG105.T903/GBA030.*MB4	70063580	MB4	KG105.T904/GBA040.*MB4	70063665	MB4
KG125.T903/GBA055.MS9	70115952	MS9	KG125.T904/GBA065.MS9	70114740	MS9
KG160.T903/GBA055.MS9	70115953	MS9	KG160.T904/GBA065.MS9	70114499	MS9

3 Pole ¹⁾	Article No.	Encl. Ref	4 Pole (3ph+Sw N ²⁾ ¹⁾	Article No.	Encl. Ref
KG20B.T903/GBA050.*SB3	70063611	SB3	KG20B.T904/GBA060.*SB3	70063632	SB3
KG32B.T903/GBA050.*SB3	70063617	SB3	KG32B.T904/GBA060.*SB3	70063633	SB3
KG41B.T903/GBA050.*SB3	70063670	SB3	KG41B.T904/GBA060.*SB3	70063634	SB3
KG64B.T903/GBA050.*SB3	70063619	SB3	KG64B.T904/GBA060.*SB3	70063635	SB3
KG80.T903/GBA050.*SB4	70063625	SB4	KG80.T904/GBA060.*SB4	70063636	SB4
KG100.T903/GBA050.*SB4	70063626	SB4	KG100.T904/GBA060.*SB4	70063637	SB4
KG105.T903/GBA050.*SB4	70063627	SB4	KG105.T904/GBA060.*SB4	70063672	SB4
KG125.T903/GBA075.SS9	70115954	SS9	KG125.T904/GBA085.SS9	70115956	SS9
KG160.T903/GBA075.SS9	70115955	SS9	KG160.T904/GBA085.SS9	70115957	SS9

Encl. Ref.	H	W	D	D1	H1	W1	d
KSA	120	85	80	-	110	-	4.2
KLC	190	100	93	-	178	-	5.6
KLD	250	145	107	-	229	124	6.5
KLE	250	145	107	-	229	124	6.5
STE	280	190	180	-	254	164	7
ST2	280	190	130	-	254	164	7
ST3	380	280	180	-	354	254	7
ST4	560	380	180	-	534	354	7
MB2	194	119	115	-	133	137	6
MB3	254	149	125	8	193	167	6
MB4	309	234	150	8	248	252	6
MS9	500	400	200	-	440	450	9
SB2	194	119	116	-	133	137	6
SB3	254	149	126	-	193	167	6
SB4	309	234	151	-	248	252	6
SS9	500	400	200	-	460	450	9

Encl. Ref.	Cable Entries.	Line Drg.
KSA	4 x 20/25mm k'outs	Fig. 1
KLC	4 x 20/25mm k'outs	Fig. 1
KLD	4 x 25/40mm k'outs	Fig. 2
KLE	4 x 25/40mm k'outs	Fig. 2
STE	1 x gland plate	Fig. 2
ST2	2 x gland plates	Fig. 2
ST3	2 x gland plates	Fig. 2
ST4	2 x gland plates	Fig. 2
MB2	-	Fig. 3
MB3	-	Fig. 3
MB4	-	Fig. 3
MS9	1 x gland plate	Fig. 5
SB2	-	Fig. 4
SB3	-	Fig. 4
SB4	-	Fig. 4
SS9	-	Fig. 5

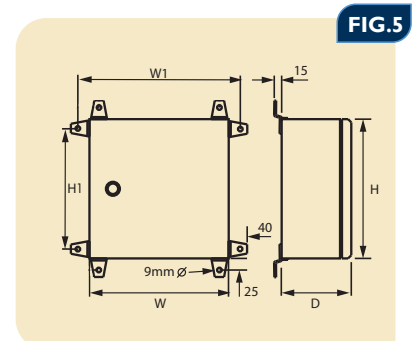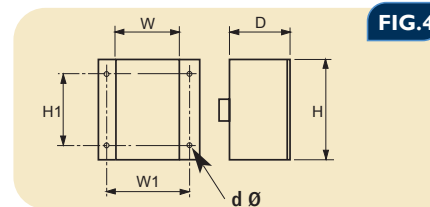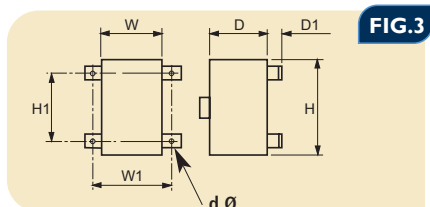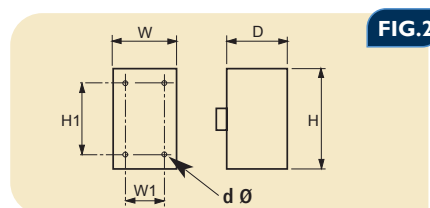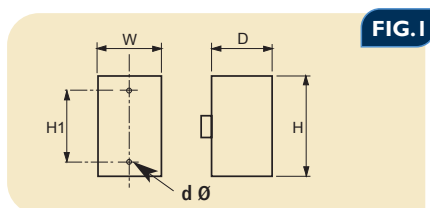

Changeover switch with centre off 16A - 315A



2, 3 & 4 POLE



IP& IK RATING IP66 + IK10 protection

ENCLOSURE GRP, grey (RAL7035)

HANDLE OPTION black & red padlockable handle

EARTH TERMINAL included

SAFETY FEATURE switch is interlocked with the lid to prevent opening in 'ON' position

Ie / AC-21A	2 Pole	Article No.	3 Pole + Aux ¹	Article No.		
16A	KH16.T902/GBCOT1.*GP2	70064871				
20A	KH20.T902/GBCOT1.*GP2	70064874				
25A	KH25.T902/GBCOT1.*GP2	70064875	KG20B.T903/GBC1U1.*GP1	70064883		
32A	KH32.T902/GBCOT1.*GP2	70064876	KG32B.T903/GBC1U1.*GP1	70064884		
40A	KH40.T902/GBCOT1.*GP2	70064877	KG41B.T903/GBC1U1.*GP1	70064885		
63A	KH63.T902/GBCOT1.*GP2	70064879	KG64B.T903/GBC1U1.*GP1	70064887		
80A	KH80.T902/GBCOT1.*GP2	70064881	KG80.T903/GBC1U1.*GP3	70064888		
100A	KH85.T902/GBCOT1.*GP2	70064882	KG100.T903/GBC1U1.*GP3	70064889		
125A			KG105.T903/GBC1U1.*GP3	70064890		
125A ³⁾			KG125.T903/GBC1T1.*GP6	70064891		
160A			KG160.T903/GBC1T1.*GP6	70064893		
200A			C200-4.T903/GBC1T1.*GP23	70064894		
315A			C316.T903/GBC1T1.*GP27	70064895		

Load switch - changeover with centre off 32A - 315A

IP RATING IP66 protection

ENCLOSURE mild steel, grey powder paint finish RAL7032

HANDLE OPTION black and red padlockable handle

4 POLE



Ie / AC-21A	4 Pole	Order Code No.	Article No.	Encl. Ref.	
32A	CA25.A213/GBA009.MB4		70132585	MB4	
40A	C32.A213/GBA009.MS21		70132582	MS21	
63A	C42.A213/GBA009.MS21		70132576	MS21	
100A	C80.A213/GBA009.MS22		70132586	MS22	
150A	C125.A213/GBA009.MS22		70122539	MS22	
200A	C200-4.A213/GBA002.MS22		70132602	MS22	
315A	C315.A213/GBA010.MS26		70115966	MS26	




DIMENSIONS

Encl. Ref.	A	B	C	D	E	F	G
GP1/GP2	300	265	165	222	316	354	184
GP3	425	325	180	348	377	480	245
GP6	500	430	210	423	485	555	353
GP23	650	540	260	573	594	705	462
GP27	805	615	315	723	665	855	533

Please refer to end of part no. for enclosure ref.

OPTIONS CAN INCLUDE :

- terminal blocks
- lid mounted push buttons & pilot lights
- emergency stop push button
- key lockable door handle

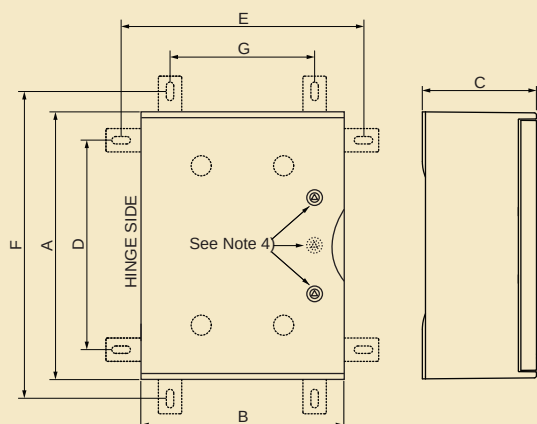

4 Pole (3ph + Sw N ²) + Aux ¹	Article No.	Ie / AC-21A
		16A
		20A
KG20B.T904/GBC1U1.*GP1	70064947	25A
KG32B.T904/GBC1U1.*GP1	70064948	32A
KG41B.T904/GBC1U1.*GP1	70064951	40A
KG64B.T904/GBC1U1.*GP1	70064952	63A
KG80.T904/GBC1U1.*GP3	70064955	80A
KG100.T904/GBC1U1.*GP3	70064957	100A
KG105.T904/GBC1U1.*GP3	70074816	125A
KG125.T904/GBC1T1.*GP6	70064965	125A ³⁾
KG160.T904/GBC1T1.*GP6	70064968	160A
C200-4.T904/GBC1T1.*GP23	70064980	200A
C316.T904/GBC1T1.*GP27	70064981	315A

Notes

- 2-off electrically isolated early break auxiliary contacts are provided. One of these contacts closes in position 1 and the other contact closes in position 2. Both of the contacts are open in the OFF position.
- Switched neutral pole is early make/late break.
- KG125 suitable for applications requiring larger cable termination and increased enclosure size.
- GP1/GP2 enclosures have 1 quarter turn lock, GP3, GP6, GP23 & GP27 enclosures have 2 quarter turn locks.

MILD STEEL enclosure





EARTH TERMINAL included + lid bonding link

SAFETY FEATURE switch is interlocked with the lid to prevent opening in 'ON' position

DIMENSIONS

Encl. Ref.	Encl. Dim. H W D	Encl. Dim. H1 H2 W1 W2
MB4	309 234 150	248 - 252 -
MS21	300 300 200	350 260 350 260
MS22	600 400 300	650 560 450 360
MS26	800 600 300	850 760 650 560

Encl. Ref.	Cable Entries.	Line Drg.
MB4	-	Fig. 1
MS21	1 x gland plate	Fig. 2
MS22	1 x gland plate	Fig. 2
MS26	2 x gland plate	Fig. 2

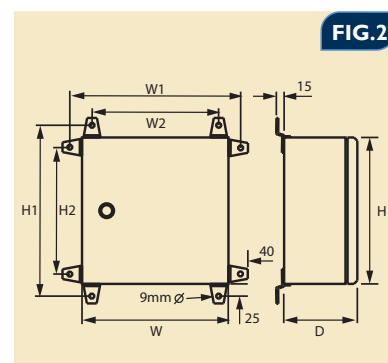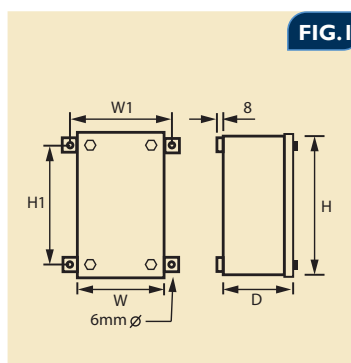

Main/emergency-off switch 25A - 63A

stayput emergency-stop pushbutton, 1 N.C. contact, twist to reset.

Switch interlocked with lid to prevent opening in 'ON' position higher ratings available on request

INSULATED

4 & 6 POLE



IP RATING IP66/67

ENCLOSURE insulated, grey (RAL7035)

HANDLE OPTION red/yellow padlockable handle

EARTH TERMINAL included

le AC-21A	Order Code No.	Article No.	Encl.Ref.
4 pole (3 ph+Sw N¹) + 1 n.o. (early break) + 1 n.c. Aux			
25A	KG20.T204/GBA285.*KL	70055051	KLD
32A	KG32.T204/GBA285.*KL	70055090	KLD
40A	KG41.T204/GBA285.*KL	70054040	KLD
63A	KG64.T204/GBA285.*KL	70054194	KLD
80A	KG80.T204/GBA285.*KL	70068336	KLD
100A	KG100.T204/GBA285.*KL	70055023	KLD
6 pole + 1 n.o. (early break) + 1 n.c. Aux			
25A	KG20B.T206/GBA095.*KL	70054557	KLD
32A	KG32B.T206/GBA095.*KL	70054686	KLD
40A	KG41B.T206/GBA095.*KL	70054689	KLD
63A	KG64B.T206/GBA095.*KL	70068337	KLD

MILD STEEL

4 & 6 POLE



IP RATING IP66

ENCLOSURE grey powder paint finish (RAL7032) also available in red paint finish (RAL3000)

HANDLE OPTION red/yellow padlockable

EARTH TERMINAL included + lid bonding link

le AC-21A	Order Code No.	Article No.	Encl.Ref.
4 pole (3 ph+Sw N¹) + 1 n.o. (early break) + 1 n.c. Aux			
25A	KG20.T204/GBA350.*MB3E	70063645	MB3E
32A	KG32.T204/GBA350.*MB3E	70063646	MB3E
40A	KG41.T204/GBA350.*MB3E	70063647	MB3E
63A	KG64.T204/GBA350.*MB3E	70063674	MB3E
80A	KG80.T204/GBA350.*MB3E	70063676	MB3E
100A	KG100.T204/GBA350.*MB3E	70063677	MB3E
6 pole + 1 n.o. (early break) + 1 n.c. Aux			
25A	KG20B.T206/GBA155.*MB3E	70063680	MB3E
32A	KG32B.T206/GBA155.*MB3E	70063682	MB3E
40A	KG41B.T206/GBA155.*MB3E	70063684	MB3E
63A	KG64B.T206/GBA155.*MB3E	70063686	MB3E

STAINLESS STEEL

4 & 6 POLE



IP RATING IP66

ENCLOSURE stainless steel, grade 316L




HANDLE OPTION red/yellow padlockable

EARTH TERMINAL included + lid bonding link

le AC-21A	Order Code No.	Article No.	Encl.Ref.
4 pole (3 ph+Sw N¹) + 1 n.o. (early break) + 1 n.c. Aux			
25A	KG20.T204/GBA440.*SB3E	70063690	SB3E
32A	KG32.T204/GBA440.*SB3E	70063695	SB3E
40A	KG41.T204/GBA440.*SB3E	70063698	SB3E
63A	KG64.T204/GBA440.*SB3E	70063699	SB3E
80A	KG80.T204/GBA440.*SB3E	70063702	SB3E
100A	KG100.T204/GBA440.*SB3E	70063703	SB3E
6 pole + 1 n.o. (early break) + 1 n.c. Aux			
25A	KG20B.T206/GBA555.*SB3E	70063704	SB3E
32A	KG32B.T206/GBA555.*SB3E	70063705	SB3E
40A	KG41B.T206/GBA555.*SB3E	70063706	SB3E
63A	KG64B.T206/GBA555.*SB3E	70063707	SB3E

DIMENSIONS

Encl. Ref.	H	Encl. Dim. W	Encl. Dim. D	Encl. Dim. D1	H1	W1	d	Cable Entries.	Line Drg.
KLD	250	145	107	-	229	124	6.5	4 x 25/40mm k'outs	Fig. 1
MB3E	254	149	125	8	193	167	6	-	Fig. 2
SB3E	254	149	126.5	-	193	167	6	-	Fig. 3



32A - 125A Mains-off-generator with appliance inlet



IP RATING IP66 protection

ENCLOSURE mild steel, grey paint finish (RAL7035)

MILD STEEL enclosure

HANDLE OPTION black & red padlockable handle, padlockable in OFF position only (other options on request)

EARTH TERMINAL included

SAFETY FEATURE switch is interlocked with the lid to prevent opening in the 'ON' positions


APPLIANCE INLET Available on either the right or left side of the enclosure. IP67 rated with locking ring. Socket is pre-wired to the switch.

DIMENSIONS

Encl. Ref.	A	B	C	D	E	K
1	300	200	150	160	260	327
2	300	200	150	160	260	355
3	400	300	200	260	360	455
4	400	300	200	260	360	430

Note

2-off electrically isolated early break auxiliary contacts are provided with the 4 pole switches. One of these contacts closes in position 1 and the other contact closes in position 2. Both of the contacts are open in the Off position.

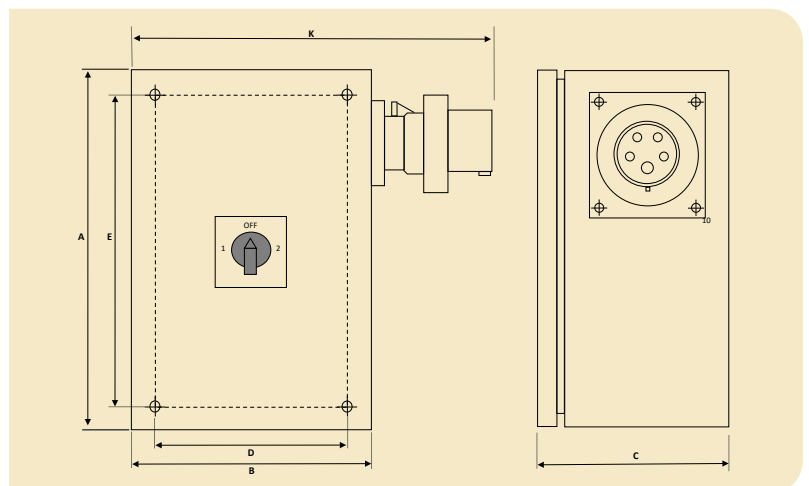

le AC-21A	Left side inlet 2 Pole - 3 Pin	Article No.	Encl. Ref	Left side inlet 4 Pole - 5 Pin + Aux	Article No.	Encl. Ref
32A	KH32.T902/GBL3P00.EB231	70080430	1	KG32B.T904/GBL5P20.EB231	70080444	1
63A	KH63.T902/GBL3P00.EB231	70080427	2	KG64B.T904/GBL5P20.EB342	70080434	3
125A				KG105.T904/GBL5P20.EB342	70080431	4
le AC-21A	Right side inlet 2 Pole - 3 Pin	Article No.	Encl. Ref	Right side inlet 4 Pole - 5 Pin + Aux	Article No.	Encl. Ref
32A	KH32.T902/GBR3P00.EB231	70080428	1	KG32B.T904/GBR5P20.EB231	70080442	1
63A	KH63.T902/GBR3P00.EB231	70080426	2	KG64B.T904/GBR5P20.EB342	70080433	3
125A				KG105.T904/GBR5P20.EB342	70077843	4

Emergency stop pushbutton station



twist to reset - 38mm diameter red mushroom head - 1 N.C. contact. Complies with EN 418/EN 60204-1.



without protective shroud				
	Order Code No.	PSN-GB0001	P.N091/GBA023.*SB31	P.N091/GBA017.*MB31
	Article No.	2169016	2336638	2337159
	Encl.Ref.	P1Y	SB31	MB31
	Features	insulated enclosure IP66/67/69K	surface mounted stainless steel 316L IP66 earth terminal & lid bonding link	surface mounted Grey RAL7032 mild steel IP66 earth terminal & lid bonding link

key operate to reset (1 included) 38mm diameter red mushroom head. Complies with EN 418/EN 60204-1.

without protective shroud				
	Order Code No.	PSN-GB0003	P.N091/GBA024.*SB31	P.N091/GBA019.*MB31
	Article No.	2169018	2337516	2337517
	Encl.Ref.	P1Y	SB31	MB31
	Features	insulated enclosure IP66/67/69K	surface mounted stainless steel 316L IP66 earth terminal & lid bonding link	surface mounted Grey RAL7032 mild steel IP66 earth terminal & lid bonding link

DIMENSIONS for all Pushbutton Stations on this page

Encl. Ref.	Front Plate						Cable Entries.	Line Drg.
	H	W	D	H1	W1	D		
P1Y	80	72	56	66.5	58.5	4.5	1 x 20mm + 2 x20/25mm k'outs	Fig. 1
SB31	100	100	60	120	70	6.5	-	Fig. 2
MB31	100	100	60	120	70	6.5	-	Fig. 2

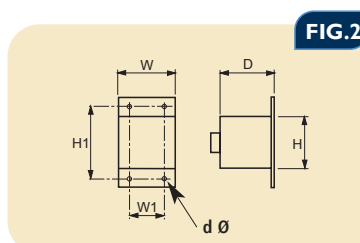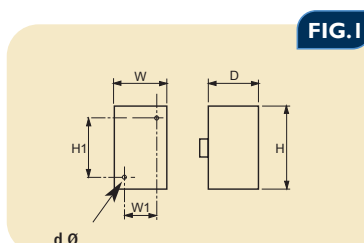

INSULATED, MILD & STAINLESS STEEL enclosure

twist to reset - 38mm diameter red mushroom head - 1 N.C. contact. Complies with EN 418/EN 60204-1.

			with protective shroud
PSN-GB0053	PN091/GBA025.*SB31	PN091/GBA021.*MB31	Order Code No.
2169036	2337520	2337521	Article No.
P1Y	SB31	MB31	Encl.Ref.
insulated enclosure IP66/67	surface mounted stainless steel 316L IP66 earth terminal & lid bonding link	surface mounted Grey RAL7032 mild steel IP66 earth terminal & lid bonding link	Features

key operate to reset (1 included) 38mm diameter red mushroom head - Complies with EN 418/EN 60204-1.

			with protective shroud
PSN-GB0054	PN091/GBA026.*SB31	PN091/GBA023.*MB31	Order Code No.
2336281	2337524	2337525	Article No.
P1Y	SB31	MB31	Encl.Ref.
insulated enclosure IP66/67	surface mounted stainless steel 316L IP66 earth terminal & lid bonding link	surface mounted Grey RAL7032 mild steel IP66 earth terminal & lid bonding link	Features

Fire alarm isolator double pole 10A

Complies with EN BS5839 Part 1:2013, marked with the symbol for on-load isolation according to BS7671:2008

Providing a secure method of safely isolating the mains power supply to CIE during maintenance periods.

The double pole device provides isolation of both the live and neutral supply and can only be operated by authorised maintenance technicians via removable key.

FEATURE key removable in both positions
supplied with 2 keys



1e AC-21A	2 Pole	Article No.	
10A	CA4.T302/GBA001.RPB1	70075317	

Rotary Control switch

Grey
Enclosure
IP65



			Order Code No.	Article No.	Encl. Ref.	
Off-On	1 pole		GB2.KN1	70068989	PF1A	
Off-On	3 pole		GB2.KN3	70068991	PF1B	
Changeover, without Off	1 pole		GB2.KN2	70063125	PF1A	
Changeover, with Off	2 pole		GB2.KN10	70068992	PF1B	

Key Operated Control switch

Grey
Enclosure
IP40



Notes 1) Key removable in all positions. 2) Key removable in '0' position only.			Order Code No.	Article No.	Encl. Ref.	
Off-On ¹⁾	3 pole		CA10.A202/GBA003.*PN	70069948	PN1G	
Off-On ¹⁾	4 pole		CA10.A203/GBA003.*PN	70069958	PN1G	
Changeover, with Off ¹⁾	2 pole		CA10.A211/GBA009.*PN	70054352	PN1G	
Changeover, without Off ¹⁾	2 pole		CA10.A221/GBA003.*PN	70069959	PN1G	
Changeover, spring return to Off ²⁾	2 pole		CA10.A215/GBA002.*PN	70069949	PN1G	
Step, 3 pos'n, without Off ¹⁾	1 pole		CA10.A230/GBA002.*PN	70069960	PN1G	
Step, 4 pos'n, without Off ¹⁾	1 pole		CA10.A231/GBA004.*PN	70069961	PN1G	

Emergency-Off Load switch 25A & 32A

3, & 4
POLE



IP RATING	IP65 protection
ENCLOSURE	grey insulated enclosure
HANDLE OPTION	red/yellow padlockable handle
EARTH TERMINAL	included
FEATURE	suitable for safety isolation in accordance with IEC 60947-3/BS EN 60947-3

AC-21A	Order Code No.	Article No.	Encl.Ref.
3 pole			
25A	GB2.KN5		70054986 PF1E
32A	GB2.KN7		70055004 PF1E
4 pole (3 ph+Sw N ¹⁾)			
25A	GB2.KN6		70054984 PF1E
32A	GB2.KN8		70055003 PF1E

Motor Reversing Load switch


3 Phase 5.5kW @ 415V
1 Phase 1.5kW @ 240V



IP RATING	IP42 protection
ENCLOSURE	grey insulated enclosure
HANDLE OPTION	grey handle/silver legend
EARTH TERMINAL	included

Order Code No.	Article No.	Encl.Ref.
GB2.KN4		70054725 PN1C

DIMENSIONS for ALL switches on this page

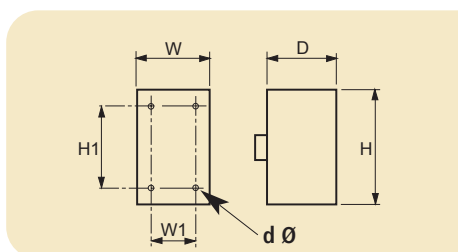

Encl. Ref.	Encl. Dim.			Encl. Dim.			Cable Entries.
	H	W	D	H1	W1	d	
PF1A	72	64	42	36	50	4.4	4 x 20mm ISO
PF1B	72	64	51	36	50	4.4	4 x 20mm ISO
PF1E	92	82	65	52	68	4.4	4 x 20mm ISO
PN1C	72	64	56	36	50	4.4	4 x 20mm ISO
PN1G	72	64	69	36	50	4.4	4 x 20mm ISO

Switch Type	Thermal Rating	Insulation Voltage, U _i	Rated operating Current & power Operational current, I _e Operational Power, 3 ph.				Short Circuit Protection	Terminal Capacity		
			AC-15	AC-21A	AC-3	AC-23A				
	Enclosed rating I _{the}		110V 220-240V 380-440V	690V	220-240V 380-440V	230-240V 380-440V	Max. fuse g _L /g _G char.	Single core/ (class 1 conductor) stranded wire, (class 2 conductor)	Flexible wire, (class 5 conductor) with sleeve.	Terminal bolt for Cu bar/lug.
	A	V	A		kW		A	mm ²	mm ²	mm ²
Switch-disconnectors - selection data in accordance with: IEC 60947, IEC 60204, BS EN 60947, BS EN 60204										
KG10	20	690	- - -	20	2.2 3.7	3 5.5	20	2.5	1.5	-
KG20	25	690	- - -	25	4 5.5	5.5 7.5	35	6	4	-
KG32	32	690	- - -	32	5.5 7.5	5.5 11	35	6	4	-
KG41	40	690	- - -	40	7.5 11	7.5 15	50	16	10	-
KG64	63	690	- - -	63	11 18.5	11 22	63	16	10	-
KG80	80	690	- - -	80	15 22	18.5 30	80	50	35	-
KG100	100	690	- - -	100	18.5 30	22 37	100	50	35	-
KG105	125	690	- - -	125	22 37	25 45	125	50	35	-
KG125	125	1000 ¹⁾	- - -	125	22 37	30 45	125	95	70	-
KG160	160	1000 ¹⁾	- - -	160	30 45	30 55	160	95	70	-
KG210	200	1000 ¹⁾	- - -	200	37 55	37 75	200	185	120	-
KG250	250	1000 ¹⁾	- - -	250	37 55	37 90	250	185	120	-
KG315	315	1000 ¹⁾	- - -	315	45 75	55 110	315	185	120	-
KH16	16	800 ¹⁾	- - -	16	3 5.5	4.5 7.5	25	6	4	-
KH20	20	800 ¹⁾	- - -	20	3.5 6.5	5.5 10	32	6	4	-
KH25	25	800 ¹⁾	- - -	25	4 7.5	7 12	35	6	4	-
KH32	32	800 ¹⁾	- - -	32	5.5 11	9 16	35	10	6	-
KH40	40	800 ¹⁾	- - -	40	7.5 15	11 20	50	10	6	-
KH63	63	1000 ¹⁾	- - -	63	11 22	18.5 30	80	35	25	-
KH80	80	1000 ¹⁾	- - -	80	15 30	23 40	100	35	25	-
KH85	100	1000 ¹⁾	- - -	100	3) 3)	3) 3)	100	35	25	-
GB2.250/A	250	1000	- - -	250	- -	75 140	315	150		M8
GB2.315/A	315	1000	- - -	315	- -	100 160	500	240		M10
GB2.400/A	400	1000	- - -	400	- -	132 220	500	240		M10
GB2.630/A	630	1000	- - -	630	- -	200 355	800	400/2x155		M12
GB2.800/A	800	1000	- - -	800	- -	250 450	800	500/2x240		M12
GB2.1000/A	1000	1000	- - -	1000	- -	- 560	1250	630/2x400		M12
GB2.1250/A	1250	1000	- - -	1250	- -	- 710	1250	2x400		M12
C200-4	200	690		200	22 37	37 75	200	95	95	M8
C316 (6 pole) (in MS10 encl)	275	1000	- - -	275	37 55	75 132	315	185	150	M12
C316 (6 pole) (in MS26, SS26 encl)	315	1000	- - -	315	37 55	75 132	315	185	150	M12
C316 (3 + 4 pole) (in GP27 encl)	315	1000	- - -	315	37 55	75 132	315	185	150	M12
Switch & Control Stations - selection data in accordance with: IEC 60947, BS EN 60947.										
CA4	10	440	- 2.5 1.5	10	0.55 2.2	0.75 3	10	2x1.5	2x1.5	-
CA25	32	690	12 12 6	32	5.5 11	7.5 15	35	2x6	2x4	-
C32	50	690	16 16 7	40	7.5 15	11 22	63	2x10	2x6	-
C42	63	690	- - -	63	11 18.5	15 30	80	2x16	2x10	-
C80	115	690	- - -	100	15 30	30 45	125	35	25	-
C125	150	690	- - -	150	22 37	37 75	200	70	50	-
C200-4	200	690	- - -	200	22 37	37 75	200	95	95	M8
C315 (In MS10 encl)	275	690	- - -	275	37 55	75 132	315	185	150	M12
C315 (In MS29 encl)	315	690	- - -	315	37 55	75 132	315	185	150	M12
GB2.KN1/KN2/KN3/KN10/CA10	20	690	5 5 4	20	3 5.5	3.7 7.5	25	2x2.5	2x2.5	-
GB2.KN4	20	690	- - -	-	3 ²⁾ 5.5 ²⁾	- -	25	2x2.5	2x2.5	-
GB2.KN5/KN6	25	690	8 8 5	25	4 7.5	5.5 11	35	2x4	2x2.5	-
GB2.KN7/KN8	32	690	14 14 6	32	5.5 11	7.5 15	50	2x6	2x4	-
P N/P SN	6	500	6 6 4	-	- -	- -	10	2.5	1.5	-

Notes: 1) Only valid for no-load switching (AC-20A) above 690v.

3) KH85 is only available as 2 pole changeover switch.

2) 1 phase, 240v, rating = 1.5kW.

Single phase rating @240v: AC-3 = 10kW, 62A. AC-23A = 11kW, 68A.

DEGREES OF PROTECTION

IP Codes















A coding system is defined by BS EN 60529 for the classification of degrees of protection provided by enclosures of electrical equipment against solid objects and water. This coding comprises the letters 'IP' followed by a two digit code as follows:-

IP 6 5

Defines protection against solid objects and access to hazardous parts.


Defines protection against water.

Degrees of protection indicated by a number up to and including '6' implies compliance with the requirements for all lower numbers. For a code with a second digit of 7 or 8, a second code must be stated to specify protection against water jets or spray. eg IP66/IP67.

1st Digit	Protection against solid objects and access to hazardous parts.	2nd Digit	Protection against water
0	No protection	0	No protection
1	 No ingress by solid objects ≥ 50 mm dia nor access to hazardous parts with the back of the hand	1	 Vertically falling drops of water shall have no harmful effect.
2	 No ingress by solid objects ≥ 12.5 mm dia nor access to hazardous parts with a finger.	2	 Vertically falling drops of water shall have no harmful effect when the enclosure is tilted at any angle up to 15° from vertical.
3	 No ingress by solid objects ≥ 2.5 mm dia nor access to hazardous parts with a tool.	3	 Water sprayed at up to 60° from the vertical shall have no harmful effect.
4	 No ingress by solid objects ≥ 1.0 mm dia nor access to hazardous parts with a wire.	4	 Water splashed from any direction shall have no harmful effect.
5	 Dust protected. Ingress of dust is not completely prevented, but there should be no harmful deposits. No access to hazardous parts with a wire.	5	 Jets of water projected from any direction shall have no harmful effect.
6	 Dust-tight. No ingress of dust. No access to hazardous parts with a wire.	6	 Strong jets of water projected from any direction shall have no harmful effect.
		7	 Temporary immersion in water shall not result in ingress of harmful quantities of water.
		8	 Continuous immersion in water shall not result in ingress of harmful quantities of water.

Reference should be made to BS EN 60529:1992 for full details concerning test and acceptance criteria.

Specification for IP69K - The IP69K rating is for applications where high pressure and high temperature washdown is used to sanitize equipment, prescribed by Germany standard DIN 40050 PART9 Products rated to IP69K must be able to withstand high-pressure and steam cleaning. • The test specifies a spray nozzle that is fed with 80°C water at 80–100 bar (~1160–1450) and a flow rate of 14–16 L/min. • The nozzle is held 10–15 cm from the tested device at angles of 0° , 30° , 60° and 90° for 30 seconds each. • The test device sits on a turntable that rotates once every 12 seconds.

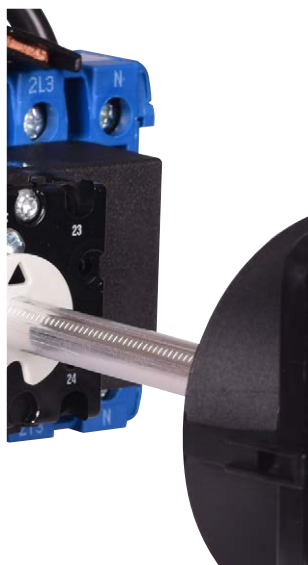

Switch-disconnectors

open switches

This section contains the most popular Kraus & Naimer Blue Line switch-disconnectors including our range of main/emergency-off switches, main switches and changeover switches.



Off/On Switch-disconnectors

Main/Emergency-Off Switch

Front Panel Mounting Single Hole Fixing Handle	32
Front Panel Mounting 4 Hole Fixing Handle	33
Base Mounting Local Padlockable Handle	32
Base Mounting Single Hole Fixing Handle	34-35
Base Mounting 4 Hole Fixing Handle	34-35
Main/Emergency-Off Switch with Defeatable Door Interlock	
Base Mounting Single Hole Fixing Handle	36
Base Mounting 4 Hole Fixing Handle	37

Changeover Switch-disconnectors

Changeover Switch with Centre Off

Base Mounting 4 Hole Fixing Handle 2, 3 & 4 pole 16A to 160A	38
Base Mounting, suitable for 45mm distribution board cutout	38

Optional Extras

Side Mounted Earth Terminal	39
Side Mounted Neutral Terminal	39
Side Mounted Auxiliary Contact	39
Mounting Tool	39
Terminal Covers	39

Technical Data, dimensions & general information

Technical Data	40
Connection Diagrams	41
Dimensions	42- 47

Off/On

Changeover

Optional extras


Technical Data



Main/Emergency-Off switch 20A to 32A

Front panel mounting single hole fixing handle

2, 3 & 4 POLE




IP RATING IP66/67/69K front protection

HANDLE OPTION Red & yellow padlockable handle or black & silver option

FRONT PLATE SIZE 48mm x 48mm

FEATURES fingerproof terminals

variations on auxiliaries available plus add-on auxiliary blocks for KG20 & KG32 (see page 39)



WITHOUT AUXILIARIES

le AC-21A	2 Pole	Article No.	
20A	KG10A.T202/04.FT2	70006518	
25A			
32A			
le AC-21A	3 Pole	Article No.	
20A	KG10A.T203/04.FT2	70011108	
25A	KG20A.T203/04.FT2	70010756	
32A	KG32A.T203/04.FT2	70010764	
le AC-21A	3 Pole + Solid Neutral	Article No.	
20A			
25A	KG20A.T207/04.FT2	70075345	
32A	KG32A.T207/04.FT2	70075346	
le AC-21A	4 Pole (3ph + Sw N ²)	Article No.	
20A	KG10A.T204/04.FT2	70011426	
25A	KG20A.T204/04.FT2	70025953	
32A	KG32A.T204/04.FT2	70021516	

The following auxiliary contacts are provided:-

KG10A 1 n.o. (early break) + 1 n.c. **KG20A, KG32A** 2 n.o. (early break)
2) Switched neutral pole is early make/late break

3 Pole + Aux	Article No.	le AC-21A
KG10A.T203/GBA319.FT2	70054222	20A
KG20A.T203/GBA320.FT2	70075348	25A
KG32A.T203/GBA320.FT2	70075347	32A
3 Pole + Solid Neutral + Aux	Article No.	le AC-21A
		20A
KG20A.T207/GBA325.FT2	70075349	25A
KG32A.T207/GBA325.FT2	70075351	32A
4 Pole (3ph + Sw N ²) + Aux	Article No.	le AC-21A
KG10A.T204/GBA330.FT2	70075353	20A
KG20A.T204/GBA330.FT2	70075358	25A
KG32A.T204/GBA330.FT2	70075359	32A

WITH AUXILIARIES 1

Technical data - Page 40

Connection diagram - Page 41

Dimensions - KG - Page 42

BASE MOUNTING

Main/Emergency-Off switch

Base mounting local padlockable handle

20A to 160A

3 & 4 POLE



HANDLE OPTION grey, padlockable in OFF position

FRONT PLATE grey with "O - 1" legend

FEATURES escutcheon suitable for 45mm cut out

fingerproof terminals - KH16 to KH40
- KG10A - KG64B

suitable for DIN rail mounting

le AC-21A	3 Pole	Article No.	4 Pole (3ph + Sw N ¹)	Article No.
20A	KG10A.T303/58.VE21	70008773	KG10A.T304/58.VE21	70019846
25A	KG20A.T303/58.VE2	70011280	KG20A.T304/58.VE2	70009967
32A	KG32A.T303/58.VE2	70011389	KG32A.T304/58.VE2	70010990
40A	KG41.T303/58.VE2	70010102	KG41.T304/58.VE2	70010824
63A	KG64.T303/58.VE2	70012797	KG64.T304/58.VE2	70010103
80A	KG80.T303/58.VE2	70010250	KG80.T304/58.VE2	70010130
100A	KG100.T303/58.VE2	70012785	KG100.T304/58.VE2	70014367
125A	KG125.T303/58.VE2	70022206	KG125.T304/58.VE2	70074391
160A	KG160.T303/58.VE2	70020523	KG160.T304/58.VE2	70060291

Notes

1) Switched neutral pole is early make/late break.

2) Auxiliaries can be fitted on request.

20A to 315A**Main/Emergency-Off switch**

Front panel mounting four hole fixing handle

IP RATING IP66/67 front protection**HANDLE OPTION** Red & yellow padlockable handle, black & silver option available

KG10A to KG160





KG210 to KG315



FRONT PLATE SIZE KG10A to KG32A: 48mm x 48mm
 KG41B to KG105: 64mm x 64mm
 KG125 to KG315: 88mm x 88mm

FEATURES fingerproof terminals (KG10A to KG64B)
 incoming terminal cover - KG80 to KG315
 (KG210 to KG315 incl.outgoing cover)

variations on auxiliaries available plus add-on auxiliary blocks (see page 39)



3 & 4 POLE

le AC-21A	3 Pole	Article No.		4 Pole (3ph + Sw N ³)	Article No.	
20A	KG10A.T203/01.E	70023201		KG10A.T204/01.E	70011454	
25A	KG20A.T203/01.E	70014345		KG20A.T204/01.E	70024808	
32A	KG32A.T203/01.E	70019435		KG32A.T204/01.E	70026015	
40A	KG41B.T203/GBA306.E	70023097		KG41B.T204/01.E	70011488	
63A	KG64B.T203/GBA306.E	70055470		KG64B.T204/01.E	70011404	
80A	KG80.T203/GBA306.E	70055347		KG80.T204/01.E	70009989	
100A	KG100.T203/GBA306.E	70055376		KG100.T204/01.E	70011179	
125A	KG105.T203/GBA306.E	70055392		KG105.T204/01.E	70011283	
125A	KG125 ² .T203/01.E	70011050		KG125 ² .T204/01.E	70010303	
160A	KG160.T203/01.E	70010013		KG160.T204/01.E	70019089	
200A	KG210.T203/05.E	70029411		KG210.T204/05.E	70024438	
250A	KG250.T203/05.E	70010014		KG250.T204/05.E	70012800	
315A	KG315.T203/05.E	70012749		KG315.T204/05.E	70019216	

WITHOUT AUXILIARIES

le AC-21A	3 Pole + Aux	Article No.		4 Pole (3ph + Sw N ³) + Aux	Article No.	
20A	KG10A.T203/GBA315.E	70075355		KG10A.T204/GBA415.E	70072587	
25A	KG20A.T203/GBA315.E	70071736		KG20A.T204/GBA415.E	70075364	
32A	KG32A.T203/GBA315.E	70071766		KG32A.T204/GBA415.E	70075365	
40A	KG41B.T203/GBA353.E	70032222		KG41B.T204/GBA426.E	70075368	
63A	KG64B.T203/GBA353.E	70054569		KG64B.T204/GBA426.E	70075371	
80A	KG80.T203/GBA353.E	70075360		KG80.T204/GBA426.E	70075372	
100A	KG100.T203/GBA353.E	70040367		KG100.T204/GBA426.E	70075366	
125A	KG105.T203/GBA353.E	70075361		KG105.T204/GBA426.E	70075373	
125A	KG125 ² .T203/GBA368.E	70055375		KG125 ² .T204/GBA045.E	70054681	
160A	KG160.T203/GBA025.E	70075362		KG160.T204/GBA045.E	70054653	
200A	KG210.T203/GBA025.E	70054684		KG210.T204/GBA035.E	70055280	
250A	KG250.T203/GBA025.E	70055384		KG250.T204/GBA035.E	70055281	
315A	KG315.T203/GBA025.E	70055279		KG315.T204/GBA035.E	70055461	

WITH AUXILIARIES¹

Notes 1) The following auxiliary contacts are provided:- **KG10A** 1 n.o. (early break) + 1 n.c. **KG20A to KG105** 2 n.o. (early break)
KG125-KG315 2 n.o. (early break) + 2 n.c. 2) Suitable for applications requiring larger cable termination 3) Switched neutral pole is early make/late break



Main/emergency-off switch

Base mounting single hole fixing handle

20A to 125A



IP RATING IP66 front protection

HANDLE OPTION red & yellow padlockable handle or black & silver option available (black & grey depending on type)

FRONT PLATE SIZE KG10A to KG32A: 48mm x 48mm
KG41B to KG105: 64mm x 64mm

FEATURES

door interlock

adjustable metal operating shaft
200mm long, switches with
alternative shaft lengths available

fingerproof terminals KG10A - KG64B
incoming terminal cover KG80 - KG105 variations on auxiliaries

available plus add-on auxiliary blocks (see page 39)

suitable for DIN rail mounting

Ie AC-21A	3 Pole	Article No.		
20A	KG10A.T203/GBA352.VE	70054547		
25A	KG20A.T203/GBA352.VE	70054190		
32A	KG32A.T203/GBA352.VE	70054246		
40A	KG41B.T203/GBA452.VE	70045507		
63A	KG64B.T203/GBA452.VE	70054179		
80A	KG80.T203/GBA452.VE	70063294		
100A	KG100.T203/GBA452.VE	70063332		
125A	KG105.T203/GBA452.VE	70063333		

Ie AC-21A	3 Pole + Aux	Article No.		
20A	KG10A.T203/GBA372.VE	70073994		
25A	KG20A.T203/GBA372.VE	70071941		
32A	KG32A.T203/GBA372.VE	70071942		
40A	KG41.T203/GBA462.VE	70063355		
63A	KG64B.T203/GBA462.VE	70063381		
80A	KG80.T203/GBA462.VE	70063382		
100A	KG100.T203/GBA462.VE	70063380		
125A	KG105.T203/GBA462.VE	70063383		

Technical data - Page 40


Connection diagram - Page 41

Dimensions - KG - Page 43-44

Main/emergency-off switch

Base mounting four hole fixing handle

20A to 315A

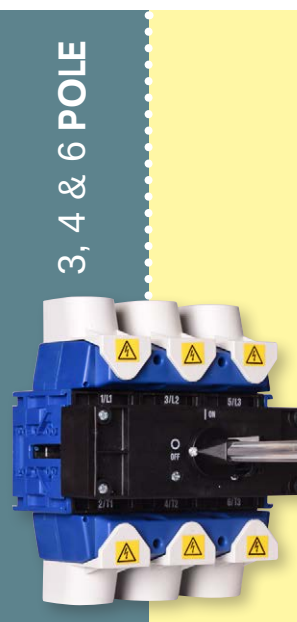

IP RATING IP66/67 front protection

HANDLE OPTION red & yellow padlockable handle, black & silver option available (black & grey depending on type)

KG10A to KG160



KG210 to KG315



FRONT PLATE SIZE KG10A to KG32A: 48mm x 48mm
KG20B to KG105: 64mm x 64mm
KG125 to KG315: 88mm x 88mm



FEATURES door interlock

adjustable metal operating shaft
200mm long (KG125 to KG315 300mm long),
switches with alternative shaft lengths available on request

fingerproof terminals (KG10A to KG64B) incoming terminal cover - KG80 to KG315
(KG210 to KG315 incl.outgoing cover) variations on auxiliaries available plus
add-on auxiliary blocks (see page 39)

suitable for DIN rail mounting - up to KG105

Ie AC-21A	3 Pole	Article No.		
20A	KG10A.T203/GBA430.VE	70054188		
25A	KG20A.T203/GBA430.VE	70054589		
32A	KG32A.T203/GBA430.VE	70053998		
40A	KG41B.T203/GBA430.VE	70054010		
63A	KG64B.T203/GBA430.VE	70055303		
80A	KG80.T203/GBA430.VE	70054022		
100A	KG100.T203/GBA430.VE	70054533		
125A	KG105.T203/GBA430.VE	70055233		
125A	KG125.T203/GBA050.VE	70062245		
160A	KG160.T203/GBA050.VE	70062248		
200A	KG210.T203/GBA015.VE	70062246		
250A	KG250.T203/GBA015.VE	70077069		
315A	KG315.T203/GBA015.VE	70062250		

Ie AC-21A	3 Pole + Aux	Article No.		
20A	KG10A.T203/GBA435.VE	70054556		
25A	KG20A.T203/GBA435.VE	70053860		
32A	KG32A.T203/GBA435.VE	70055197		
40A	KG41B.T203/GBA435.VE	70054002		
63A	KG64B.T203/GBA435.VE	70050582		
80A	KG80.T203/GBA435.VE	70055098		
100A	KG100.T203/GBA435.VE	70055440		
125A	KG105.T203/GBA435.VE	70054536		
125A	KG125.T203/GBA055.VE	70055033		
160A	KG160.T203/GBA055.VE	70054651		
200A	KG210.T203/GBA030.VE	70055455		
250A	KG250.T203/GBA030.VE	70055242		
315A	KG315.T203/GBA030.VE	70055398		

Technical data - Page 40

Connection diagram - Page 41

Dimensions - KG - Page 43-44

3 Pole + Solid Neutral	Article No.	4 Pole (3ph + Sw N ²)	Article No.	Price (€)	6 Pole	Article No.	
		KG10A.T204/GBA237.VE	70075374				
KG20A.T207/GBA220.VE	70075367	KG20A.T204/GBA237.VE	70075377		KG20B.T206/GBA230.VE	70063519	
KG32A.T207/GBA220.VE	70075369	KG32A.T204/GBA237.VE	70075378		KG32B.T206/GBA230.VE	70063520	
KG41B.T207/GBA240.VE	70063858	KG41B.T204/GBA447.VE	70063413		KG41B.T206/GBA410.VE	70063521	
KG64B.T207/GBA240.VE	70063859	KG64B.T204/GBA447.VE	70063415		KG64B.T206/GBA410.VE	70063522	
KG80.T207/GBA240.VE	70063860	KG80.T204/GBA447.VE	70063417		KG80.T206/GBA410.VE	70063523	
KG100.T207/GBA240.VE	70063861	KG100.T204/GBA447.VE	70063421		KG100.T206/GBA410.VE	70063524	
KG105.T207/GBA240.VE	70063862	KG105.T204/GBA447.VE	70063423		KG105.T206/GBA410.VE	70063525	

WITHOUT AUXILIARIES

3 Pole + Solid Neutral + Aux	Article No.	4 Pole (3ph + Sw N ²) + Aux	Article No.	6 Pole + Aux	Article No.	
		KG10A.T204/GBA247.VE	70075381			
KG20A.T207/GBA225.VE	70075379	KG20A.T204/GBA247.VE	70075382	KG20B.T206/GBA236.VE	70076959	
KG32A.T207/GBA225.VE	70075380	KG32A.T204/GBA247.VE	70069683	KG32B.T206/GBA228.VE	70063548	
KG41B.T207/GBA245.VE	70063872	KG41B.T204/GBA457.VE	70063506	KG41B.T206/GBA415.VE	70076969	
KG64B.T207/GBA245.VE	70063873	KG64B.T204/GBA457.VE	70063507	KG64B.T206/GBA415.VE	70077046	
KG80.T207/GBA245.VE	70063874	KG80.T204/GBA457.VE	70063509	KG80.T206/GBA415.VE	70063553	
KG100.T207/GBA245.VE	70063875	KG100.T204/GBA457.VE	70063511	KG100.T206/GBA415.VE	70063554	
KG105.T207/GBA245.VE	70077059	KG105.T204/GBA457.VE	70063502	KG105.T206/GBA415.VE	70063615	

WITH AUXILIARIES¹

Notes 1) The following auxiliary contacts are provided:- KG10A 1 n.o. (early break) +1 n.c. KG20A to KG105 2 n.o. (early break)
2) Switched neutral pole is early make/late break

3 Pole + Solid Neutral	Article No.	4 Pole (3ph + Sw N ³)	Article No.	6 Pole	Article No.	
		KG10A.T204/GBA450.VE	70054047			
KG20A.T207/GBA140.VE	70055369	KG20A.T204/GBA450.VE	70069322	KG20B.T206/GBA221.VE	70062495	
KG32A.T207/GBA140.VE	70071547	KG32A.T204/GBA450.VE	70072339	KG32B.T206/GBA221.VE	70062502	
KG41B.T207/GBA140.VE	70055469	KG41B.T204/GBA450.VE	70054004	KG41B.T206/GBA221.VE	70062507	
KG64B.T207/GBA140.VE	70055492	KG64B.T204/GBA450.VE	70053711	KG64B.T206/GBA221.VE	70062510	
KG80.T207/GBA140.VE	70055439	KG80.T204/GBA450.VE	70055437	KG80.T206/GBA221.VE	70062513	
KG100.T207/GBA140.VE	70055230	KG100.T204/GBA450.VE	70055441	KG100.T206/GBA221.VE	70062515	
KG105.T207/GBA140.VE	70055198	KG105.T204/GBA450.VE	70036139	KG105.T206/GBA221.VE	70062517	
KG125 ² .T207/GBA151.VE	70063743	KG125 ² .T204/GBA100.VE	70062420	KG125 ² .T206/GBA061.VE	70062519	
KG160.T207/GBA151.VE	70063744	KG160.T204/GBA100.VE	70062427	KG160.T206/GBA061.VE	70062521	
KG210.T207/GBA156.VE	70063745	KG210.T204/GBA020.VE	70055448			
KG250.T207/GBA156.VE	70063746	KG250.T204/GBA020.VE	70029036			
KG315.T207/GBA157.VE	70063748	KG315.T204/GBA020.VE	70062436			

WITHOUT AUXILIARIES

3 Pole + Solid Neutral + Aux	Article No.	4 Pole (3ph + Sw N ³) + Aux	Article No.	6 Pole + Aux	Article No.	
		KG10A.T204/GBA455.VE	70054102			
KG20A.T207/GBA145.VE	70055368	KG20A.T204/GBA455.VE	70055399	KG20B.T206/GBA225.VE	70054103	
KG32A.T207/GBA145.VE	70055370	KG32A.T204/GBA455.VE	70055462	KG32B.T206/GBA225.VE	70055465	
KG41B.T207/GBA145.VE	70055471	KG41B.T204/GBA455.VE	70055466	KG41B.T206/GBA225.VE	70055228	
KG64B.T207/GBA145.VE	70055493	KG64B.T204/GBA455.VE	70055491	KG64B.T206/GBA225.VE	70054668	
KG80.T207/GBA145.VE	70054985	KG80.T204/GBA455.VE	70055438	KG80.T206/GBA225.VE	70055382	
KG100.T207/GBA145.VE	70055236	KG100.T204/GBA455.VE	70055442	KG100.T206/GBA225.VE	70054187	
KG105.T207/GBA145.VE	70055365	KG105.T204/GBA455.VE	70055226	KG105.T206/GBA225.VE	70055252	
KG125 ² .T207/GBA150.VE	70063760	KG125 ² .T204/GBA105.VE	70054168	KG125 ² .T206/GBA070.VE	70054620	
KG160.T207/GBA150.VE	70063761	KG160.T204/GBA105.VE	70055043	KG160.T206/GBA070.VE	70055400	
KG210.T207/GBA155.VE	70063762	KG210.T204/GBA040.VE	70055456			
KG250.T207/GBA155.VE	70063763	KG250.T204/GBA040.VE	70055238			
KG315.T207/GBA155.VE	70077056	KG315.T204/GBA040.VE	70055362			

WITH AUXILIARIES¹

Notes 1) The following auxiliary contacts are provided:- KG10A 1 n.o. (early break) +1 n.c. KG20A to KG105 2 n.o. (early break)
KG125 to KG315 2 n.o. (early break) +2 n.c. 2) Suitable for applications requiring larger cable termination 3) Switched neutral pole is early make/late break




Main/emergency-Off switch

25A to 160A

Base mounting single hole fixing handle

3 & 4 POLE



METAL OPERATING SHAFT

IP RATING

IP66/67 front protection

HANDLE OPTION

red & yellow padlockable handle or black & silver option available

FEATURES

alternative shaft lengths available on request
fingerproof terminals -KG20B to KG64B
incoming terminal cover -KG80 to KG160
suitable for DIN rail mounting up to KG105
variations on auxiliaries available plus add-on auxiliary blocks (see page 39)

WITHOUT AUXILIARIES

le AC-21A	3 Pole	Article No.	4 Pole (3ph + Sw N ²)	Article No.
25A	KG20B.T203/GBA340.VE	70075384	KG20B.T204/GBA350.VE	70070722
32A	KG32B.T203/GBA340.VE	70075387	KG32B.T204/GBA350.VE	70075435
40A	KG41B.T203/GBA370.VE	70075389	KG41B.T204/GBA380.VE	70075436
63A	KG64B.T203/GBA370.VE	70072697	KG64B.T204/GBA380.VE	70072864
80A	KG80.T203/GBA370.VE	70075414	KG80.T204/GBA380.VE	70075440
100A	KG100.T203/GBA370.VE	70075416	KG100.T204/GBA380.VE	70075441
125A	KG105.T203/GBA370.VE	70075417	KG105.T204/GBA380.VE	70060752
125A ³	KG125.T203/GBA180.VE	70075430	KG125.T204/GBA190.VE	70075437
160A	KG160.T203/GBA180.VE	70075433	KG160.T204/GBA190.VE	70075439

WITH AUXILIARIES¹

le AC-21A	3 Pole + Aux	Article No.	4 Pole (3ph + Sw N ²) + Aux	Article No.
25A	KG20B.T203/GBA345.VE	70071821	KG20B.T204/GBA355.VE	70076833
32A	KG32B.T203/GBA345.VE	70070923	KG32B.T204/GBA355.VE	70076836
40A	KG41B.T203/GBA375.VE	70076830	KG41B.T204/GBA385.VE	70076837
63A	KG64B.T203/GBA375.VE	70076831	KG64B.T204/GBA385.VE	70076838
80A	KG80.T203/GBA375.VE	70076772	KG80.T204/GBA385.VE	70076777
100A	KG100.T203/GBA375.VE	70076773	KG100.T204/GBA385.VE	70076778
125A	KG105.T203/GBA375.VE	70076832	KG105.T204/GBA385.VE	70076839
125A ³	KG125.T203/GBA185.VE	70076774	KG125.T204/GBA195.VE	70076779
160A	KG160.T203/GBA185.VE	70076776	KG160.T204/GBA195.VE	70076780

Notes

1) The following auxiliary contacts are provided:-
KG10A 1 n.o. (early break) + 1 n.c.
KG20A to KG105 2 n.o. (early break)
KG125 to KG160 2 n.o. (early break) + 2 n.c.

2) Switched neutral pole is early make/late break

3) Suitable for applications requiring larger cable terminations than KG105

Technical data - Page 40

Connection diagram - Page 41

Dimensions - KG - Page 43

When required for maintenance purposes, qualified personnel can defeat the door interlock and enable the panel door to be opened whilst the switch is in the 'ON' position. Door clutch will accept 3mm

misalignment between switch shaft and door mounted handle. In normal operation the switch handle is padlockable in the OFF position only and interlocked with the shaft in the ON position to

prevent opening of the panel door. Shaft and handle are also interlocked in the OFF position if a padlock is fitted to the handle with the panel door closed.

defeatable door interlock

BASE MOUNTING - DEFEATABLE DOOR INTERLOCK

40A to 315A

Main/emergency-Off switch

Base mounting four hole fixing handle

IP RATING IP66 front protection

HANDLE OPTION red & yellow padlockable handle or black & silver option available

METAL OPERATING SHAFT KG41B to KG105: 200mm long
KG125 to KG315: 300mm long


FEATURES alternative shaft lengths available on request

fingerproof terminals -KG41B to KG64B

incoming terminal cover -KG80 to KG315
(KG210 to KG315 also incl. outgoing cover)

suitable for DIN rail mounting up to KG105

variations on auxiliaries available plus add-on auxiliary blocks (see page 39)

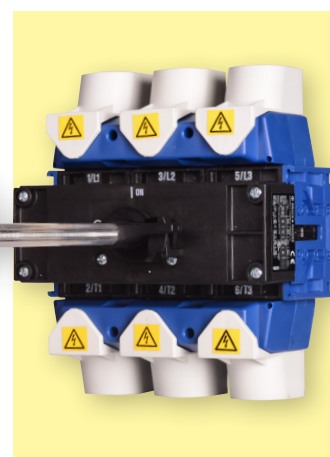

3, 4 & 6 POLE

le AC-21A	3 Pole	Article No.	4 Pole (3ph + Sw N ²)	Article No.	6 Pole	Article No.
40A	KG41B.T203/GBA330.VE	70069397	KG41B.T204/GBA060.VE	70011135	KG41B.T206/GBA121.VE	70075463
63A	KG64B.T203/GBA330.VE	70011792	KG64B.T204/GBA060.VE	70020234	KG64B.T206/GBA121.VE	70077349
80A	KG80.T203/GBA330.VE	70072322	KG80.T204/GBA060.VE	70075445	KG80.T206/GBA121.VE	70076767
100A	KG100.T203/GBA330.VE	70075442	KG100.T204/GBA060.VE	70075452	KG100.T206/GBA121.VE	70076768
125A	KG105.T203/GBA330.VE	70072436	KG105.T204/GBA060.VE	70010365	KG105.T206/GBA121.VE	70076769
125A ³	KG125.T203/GBA080.VE	70075444	KG125.T204/GBA090.VE	70073314	KG125.T206/GBA104.VE	70072950
160A	KG160.T203/GBA080.VE	70073327	KG160.T204/GBA090.VE	70069984	KG160.T206/GBA104.VE	70076771
200A	KG210.T203/GBA080.VE	70073329	KG210.T204/GBA090.VE	70022048		
250A	KG250.T203/GBA080.VE	70035192	KG250.T204/GBA090.VE	70025477		
315A	KG315.T203/GBA080.VE	70073330	KG315.T204/GBA090.VE	70075455		

WITHOUT AUXILIARIES

le AC-21A	3 Pole + Aux	Article No.	4 Pole (3ph + Sw N ¹) + Aux	Article No.	6 Pole + Aux	Article No.
40A	KG41B.T203/GBA335.VE	70076840	KG41B.T204/GBA065.VE	70076783	KG41B.T206/GBA125.VE	70076854
63A	KG64B.T203/GBA335.VE	70076782	KG64B.T204/GBA065.VE	70076848	KG64B.T206/GBA125.VE	70076855
80A	KG80.T203/GBA335.VE	70076841	KG80.T204/GBA065.VE	70076849	KG80.T206/GBA125.VE	70076856
100A	KG100.T203/GBA335.VE	70076842	KG100.T204/GBA065.VE	70075935	KG100.T206/GBA125.VE	70076857
125A	KG105.T203/GBA335.VE	70076843	KG105.T204/GBA065.VE	70076850	KG105.T206/GBA125.VE	70076858
125A ³	KG125.T203/GBA085.VE	70073242	KG125.T204/GBA095.VE	70058680	KG125.T206/GBA105.VE	70076859
160A	KG160.T203/GBA085.VE	70076844	KG160.T204/GBA095.VE	70076785	KG160.T206/GBA105.VE	70076860
200A	KG210.T203/GBA085.VE	70076845	KG210.T204/GBA095.VE	70076851		
250A	KG250.T203/GBA085.VE	70076846	KG250.T204/GBA095.VE	70076852		
315A	KG315.T203/GBA085.VE	70076847	KG315.T204/GBA095.VE	70076853		

WITH AUXILIARIES¹

Notes

1) The following auxiliary contacts are provided:-
KG10A 1 n.o. (early break) + 1 n.c.
KG20A to KG105 2 n.o. (early break)
KG125 to KG315 2 n.o. (early break) + 2 n.c.

2) Switched neutral pole is early make/late break

3) Suitable for applications requiring larger cable terminations than KG105

Technical data - Page 40
Connection diagram - Page 41
Dimensions - KG - Page 43

When required for maintenance purposes, qualified personnel can defeat the door interlock and enable the panel door to be opened whilst the switch is in the 'ON' position. Door clutch will accept 3mm

misalignment between switch shaft and door mounted handle. In normal operation the switch handle is padlockable in the OFF position only and interlocked with the shaft in the ON position to


prevent opening of the panel door. Shaft and handle are also interlocked in the OFF position if a padlock is fitted to the handle with the panel door closed.

defeatable
door
interlock

Changeover switch, centre off

Base mounting four hole fixing handle

2, 3 & 4 POLE

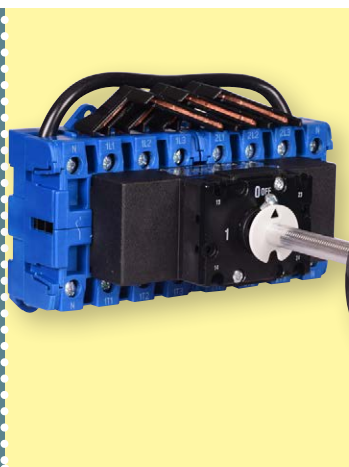

IP RATING IP66/67 front protection

HANDLE OPTION black/silver padlockable handle

FRONT PLATE SIZE KH16 to KH85: 64mm x 64mm
KG20B to KG64B: 64mm x 64mm
KG80 to KG160 88mm x 88mm

METAL OPERATING SHAFT FEATURES – 120mm long KH16 to KH25, KG20B & KG32B
– 130mm long KH32 to KH85, KG41B to KG105
– 190mm long KG125 & KG160

door interlock

alternative shaft lengths available

fingerproof terminals – KH16 to KH40

– KG20B to KG64B

incoming terminal cover – KG80 to KG105

suitable for DIN rail mounting up to KG105 and all KH switches

le AC-21A	2 Pole	Article No.	3 Pole + aux ¹⁾	Article No.	4 Pole (3ph + Sw N ²⁾ + aux ¹⁾	Article No.
16A	KH16.T902/GBA005.VE	70055495				
20A	KH20.T902/GBA005.VE	70055487				
25A	KH25.T902/GBA005.VE	70055500	KG20B.T903/GBA005.VE	70054057	KG20B.T904/GBA006.VE	70055454
32A	KH32.T902/GBA005.VE	70054539	KG32B.T903/GBA005.VE	70054592	KG32B.T904/GBA006.VE	70054565
40A	KH40.T902/GBA005.VE	70055394	KG41B.T903/GBA005.VE	70063576	KG41B.T904/GBA006.VE	70054213
63A	KH63.T902/GBA005.VE	70055297	KG64B.T903/GBA005.VE	70054180	KG64B.T904/GBA006.VE	70054217
80A	KH80.T902/GBA005.VE	70055507	KG80.T903/GBA005.VE	70054676	KG80.T904/GBA006.VE	70054576
100A	KH85.T902/GBA005.VE	70055239	KG100.T903/GBA005.VE	70054646	KG100.T904/GBA006.VE	70052605
125A			KG105.T903/GBA005.VE	70054712	KG105.T904/GBA006.VE	70054545
125A ³⁾			KG125 ³⁾ .T903/GBA010.VE	70054682	KG125 ³⁾ .T904/GBA020.VE	70055374
160A			KG160.T903/GBA010.VE	70054537	KG160.T904/GBA020.VE	70055045

Notes 1) 2-off volt-free, early break, auxiliary contacts are provided. One of these contacts closes in pos. 1 and the other contact closes in pos. 2. Both of the contacts are open in the Off position.

2) Switched neutral pole is early make/late break

3) Suitable for applications requiring larger cable terminations than KG105

Technical data – Page 40

Connection diagram – Page 41

Dimensions – **KG** – Page 45

– **KH** – page 47

Changeover switch, centre off

Base mounting

2 & 4 POLE



HANDLE OPTION grey, padlockable in OFF position

FRONT PLATE grey with "1 - OFF - 2" legend

FEATURES escutcheon suitable for 45mm cut out

fingerproof terminals – KH16 to KH40

– KG41B & KG64B

suitable for DIN rail mounting

le AC-21A	2 Pole	Article No.	4 Pole (3ph + Sw N ¹⁾	Article No.
16A	KH16.T902/GBA011.VE2	70055286		
20A	KH20.T902/GBA011.VE2	70076861		
25A	KH25.T902/GBA011.VE2	70076885		
32A	KH32.T902/GBA011.VE2	70055237		
40A	KH40.T902/GBA011.VE2	70076886	KG41B.T904/GBA035.VE2	70076789
63A	KH63.T902/GBA011.VE2	70055504	KG64B.T904/GBA035.VE2	70055287
80A	KH80.T902/GBA011.VE2	70053696	KG80.T904/GBA035.VE2	70076862
100A	KH85.T902/GBA011.VE2	70055508	KG100.T904/GBA035.VE2	70055204
125A			KG105.T904/GBA035.VE2	70076863

Notes

1) Switched neutral pole is early make/late break.

Technical data – Page 40

Connection diagram – Page 41

Dimensions – **KG** – Page 46

– **KH** – page 47

Earth terminal

Switch Type	Order Code No.	Article No.	
KG20A, KG32A, KG20B, KG32B	K0.H052/A	2000019	
KG41B, KG64B	K1.H052/B	2145758	
KG80 - KG105	K2.H052/C	2146137	



SIDE
MOUNTED

Neutral terminal (fully rated)

Switch Type	Order Code No.	Article No.	
KG20A, KG32A, KG20B, KG32B	K0.H053/A	2000020	
KG41B, KG64B	K1.H053/B	2145760	
KG80 - KG105	K2.H053/C	2146139	



SIDE
MOUNTED

Auxiliary contacts

Switch Type	Contact Arrangements	Contact Rating		Order Code No.	Article No.	
		AC-21A	AC-15 @ 110-240V			
Panel Mounting E & FT						
KG20A, KG32A	1 n.o. + 1 n.c.	10A	2.5A	K0.H010/A11-E	2148130	
KG41B, KG64B	1 n.o. + 1 n.c.	16A	6A	K1.H010/A11-E	2148548	
KG80 - KG105	1 n.o. + 1 n.c.	16A	6A	K2.H010/A11-E	2138586	
KG125, KG160	2 n.o. + 1 n.c.	16A	6A	K3A.H010/A21-E	2150117	
KG210 - KG315	2 n.o. + 1 n.c.	16A	6A	K3.H010/A21-E	2149795	
Base Mounting VE						
KG20A, KG20B, KG32A, KG32B	1 n.o. + 1 n.c.	10A	2.5A	K0.H010/A11-VE	2000018	
KG41B, KG64B	1 n.o. + 1 n.c.	16A	6A	K1.H010/A11-VE	2148551	
KG80 - KG105	1 n.o. + 1 n.c.	16A	6A	K2.H010/A11-VE	2149126	
KG125 - KG160	2 n.o. + 1 n.c.	16A	6A	K3A.H010/A21-VE	2150121	
KG210 - KG315	2 n.o. + 1 n.c.	16A	6A	K3.H010/A21-VE	2149799	



SIDE
MOUNTED

KG switches are also available with a variety of factory fitted auxiliary contacts. Please enquire for details.

Mounting tool


Switch Type	Order Code No.	Article No.	
For single hole mounting operators	S00.T170.09	2005361	



SINGLE
HOLE

Terminal covers

Switch Type	Order Code No. 3 main terminals	Article No.	Price (€)	Order Code No. 4 main terminals	Article No.	
KG10A	S0.M160/A12.K2	2026554	5.64	S0.M160/A12.K2	2026554	
KG20A&B/KG32A&B	K0.M160/3	2145329	2.26	K0.M160/4	2145330	
KG41B/KG64B	K1.M160/3	2139001	2.82	K1.M160/4	2145762	
KG80/KG105	K2.M160/3	2146141	3.96	K2.M160/4	2146142	
KG125/KG160	K3.M160/32	2149933	6.78	K3.M160/42	2149938	
KG210/KG315	K3.M160/30	2149931	11.01	K3.M160/40	2149936	
KH32/KH40				K1.M160/45.VE ¹⁾	2148581	
KH63/KH85				K1.M160/44.VE ¹⁾	2148579	

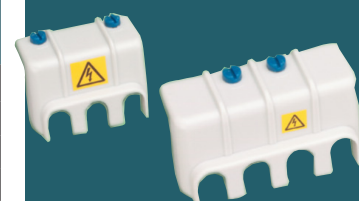

3 & 4 MAIN
TERMINALS

Notes

1) Suffix VE is applicable for base mounting switches only

Switch disconnectors



Switch Type	Thermal Rating	Insulation Voltage, Ui	Rated Operating Current & Power								Short Circuit Protection	Terminal Capacity			
			Operational Current, Ie				Operational Power					Single core/ stranded wire	Flexible wire/ with sleeve	Terminal bolt for Cu bar/lug	
	Ith		AC-15		AC-21A	AC-3			AC-23A						Max. fuse gL/gG char.
	Open rating		110v 220-240v 380-440v	690v	220-240v, 1 ph.	220-240v, 3 ph.	380-440v, 3 ph.	220-240v, 1 ph.	220-240v, 3 ph.	380-440v, 3 ph.					
											A	V	A		
Switch-disconnectors - selection data in accordance with: IEC 60947, IEC60204, BS EN 60947, BS EN 60204															
KG10	20	690	-		20	1.1	2.2	3.7	1.5	3	5.5	20	2.5	1.5	-
KG20	25	690	-		25	1.5	4	5.5	2.2	5.5	7.5	35	6	4	-
KG32	32	690	-		32	2.2	5.5	7.5	3	5.5	11	35	6	4	-
KG41	40	690	-		40	3	7.5	11	4	7.5	15	50	16	10	
KG64	63	690	-		63	4	11	18.5	5.5	11	22	63	16	10	
KG80	80	690	-		80	7.5	15	22	10	18.5	30	80	50	35	-
KG100	100	690	-		100	8.5	18.5	30	11	22	37	100	50	35	-
KG105	125	690	-		125	-	22	37	-	25	45	125	50	35	-
KG125	125	1000 ¹	-		125	-	22	37	-	30	45	125	95	70	
KG160	160	1000 ¹	-		160	-	30	45	-	30	55	160	95	70	-
KG210	200	1000 ¹	-		200	-	37	55	-	37	75	200	185	120	-
KG250	250	1000 ¹	-		250	-	37	55	-	37	90	250	185	120	-
KG315	315	1000 ¹	-		315	-	45	75	-	55	110	315	185	120	-
KH16	16	800 ¹	-		16	1.5	3	5.5	2	4.5	7.5	25	6	4	-
KH20	20	800 ¹	-		20	2	3.5	6.5	2.5	5.5	10	32	6	4	-
KH25	25	800 ¹	-		25	2.5	4	7.5	3.3	7	12	35	6	4	-
KH32	32	800 ¹	-		32	3	5.5	11	4.2	9	16	35	10	6	-
KH40	40	800 ¹	-		40	4.5	7.5	15	5.5	11	20	50	10	6	-
KH63	63	1000 ¹	-		63	7.5	11	22	8.5	18.5	30	80	35	25	-
KH80	80	1000 ¹	-		80	10	15	30	11	23	40	100	35	25	-
KH85	100	1000 ¹	-		100	10	-	-	11	-	-	100	35	25	-
Auxiliary contacts - selection data in accordance with IEC 60947, BS EN 60947															
KG10	20	690	6	6	4	20	-	-	-	-	-	20	2.5	2.5	-
KG20 & KG32	10	500	2.5	2.5	1.5	10 ²	-	-	-	-	-	10	1.5	1.5	-
KG41- KG105	16	690	6	6	3	16	-	-	-	-	-	16	2.5	2.5	-
KG125- KG315	16	690	6	6	3	16	--	-	-	-	-	16	2.5	2.5	

Notes: 1) Only valid for no-load switching (AC-20A) above 690v. 2) Max 500v



Switch Rating or Utilization Category	Switch Selection - Common Rating Data and Utilization Categories Description
Rated insulation voltage U	Maximum value of operational voltage
Thermal current, I _{th}	Maximum value of current that the switch can carry (not switch) when mounted in free air Max. ambient air temperature for stated value:- KG/KH switches +50°C average over 24hrs with peaks up to 55°C
AC-3	For the selection of switches used for starting of squirrel cage motors and switching off during running
AC-15	For the selection of switches used for the control of an a.c. electromagnetic load e.g. contactor coils
AC-21A	For the selection of switches required for switching of resistive loads, including moderate overloads
AC-23A	For the selection of switches required for switching motor loads or other highly inductive loads
	Normal selection criteria for emergency-off switches for motors and switches used for safety isolation of motors (switch-disconnectors) such as Off/On, main or main/emergency-off switches.

CONNECTION DIAGRAMS



Switch disconnectors

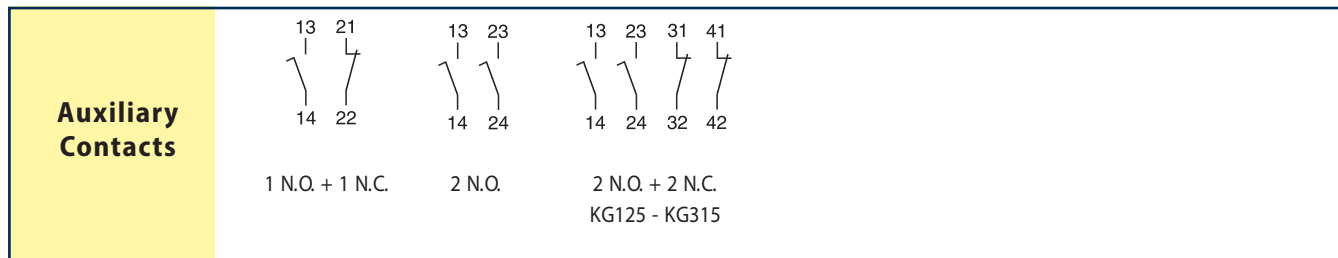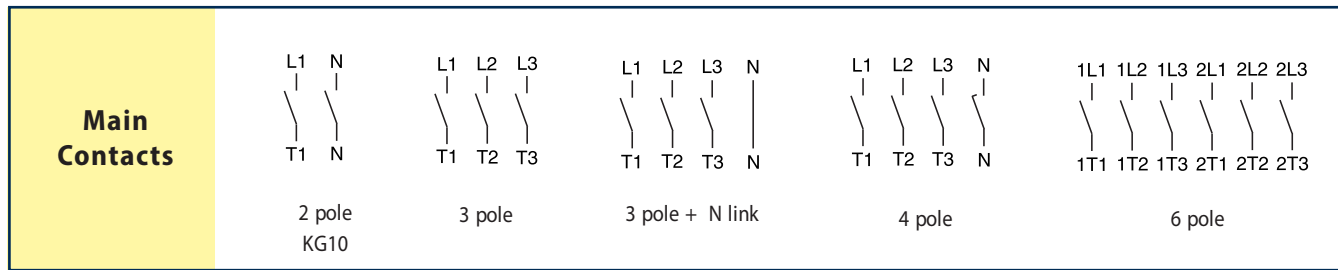

Off - On

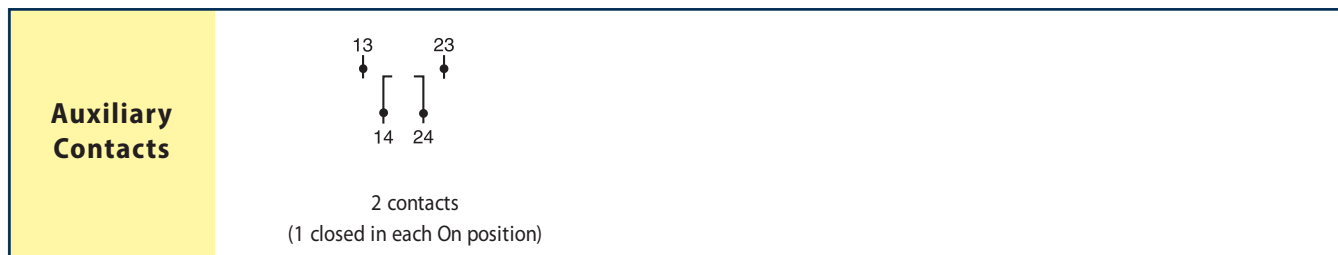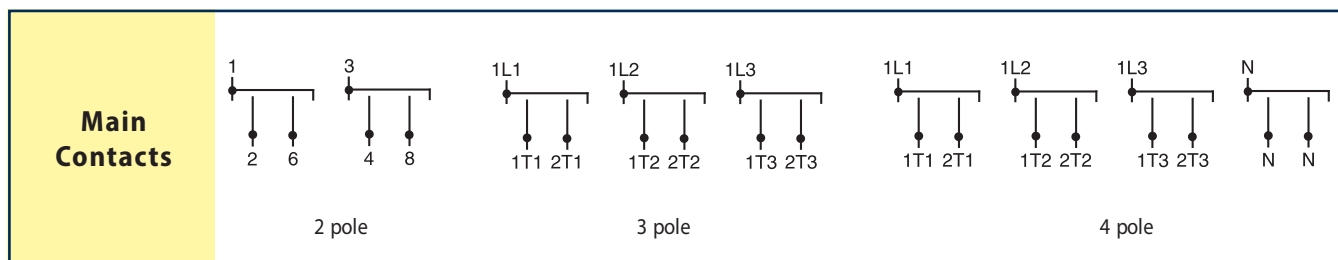


Changeover
with Centre Off

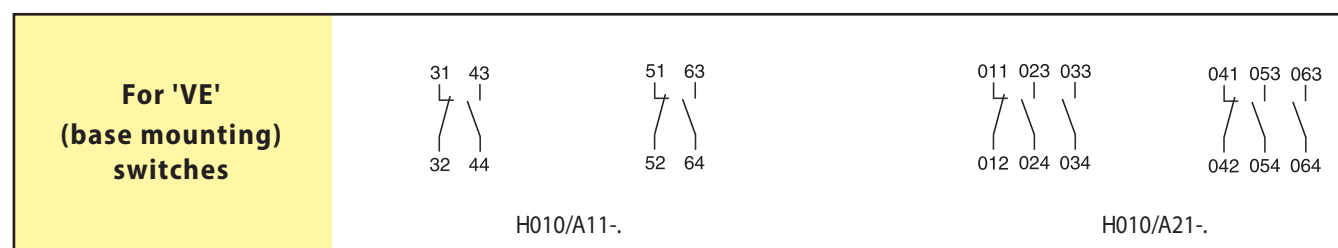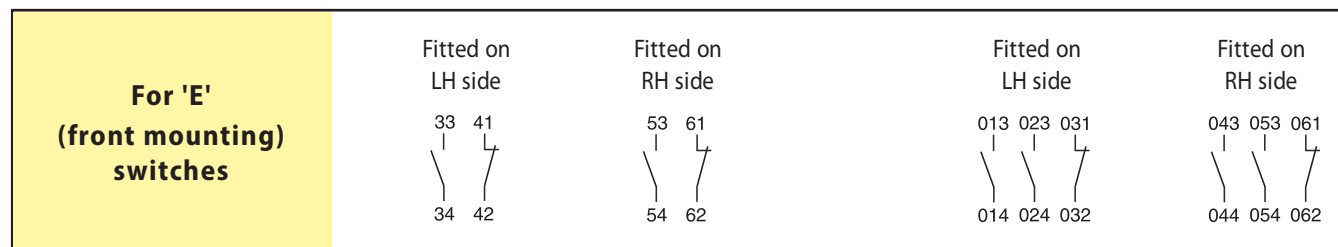


Side Mounting
Auxiliary Contacts

KG Main/emergency-off switches

Front Panel Mounting Single Hole Fixing

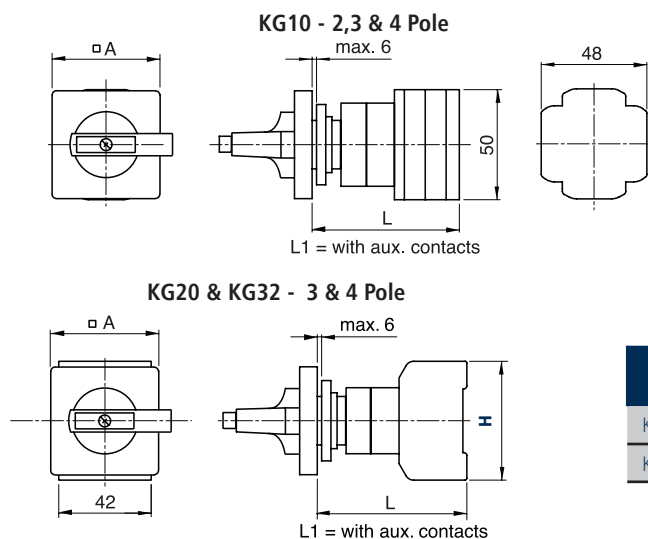


Mounting Hole




	A	H	L 2 Pole	L 3/4 Pole	L1 3/4 Pole
KG10A	48	-	57.4	66.9	76.4
KG20A, KG32A	48	54	-	68.3	77.3


Front Panel Mounting Four Hole Fixing

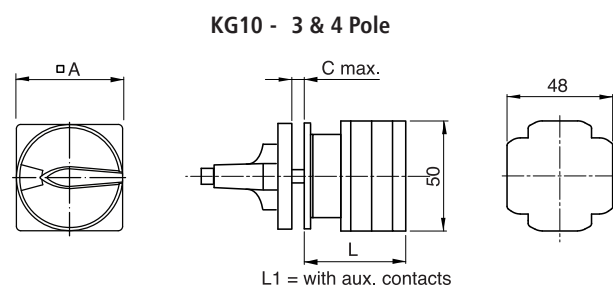

Mounting Holes




KG20 to KG105 - 3 & 4 Pole

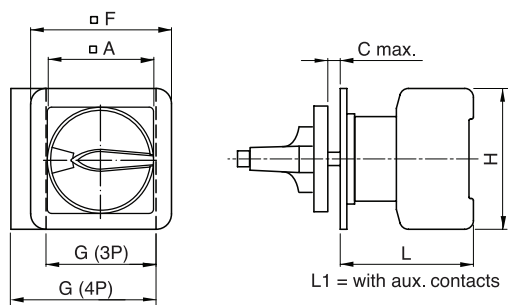

	A	B	C	D1	D2	F
KG10A	48	36	4	11 - 15	5	-
KG20A, KG32A	48	36	4	10 - 15	5	48
KG41B, KG64B	64	48	4	10 - 15	5	64
KG80, KG100, KG105	64	48	4	10 - 15	5	70
KG125, KG160	88	68	5.5	13 - 17	6	-
KG210, KG250, KG315	88	68	5.5	13 - 17	6	-

KG125 to KG315 - 3 & 4 Pole

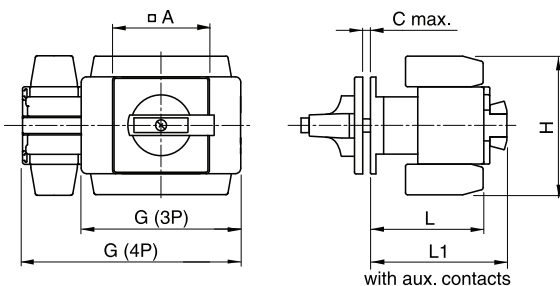

	G 3 pole	G 4 pole	H	L	L1
KG10A - 2 pole	-	-	-	38.7	-
KG10A - 3/4 pole	-	-	-	48.2	57.7
KG20A, KG32A	42	55.5	54	53.8	62.8
KG41B, KG64B	50	66	64	60.5	70.5
KG80, KG100	70	92	80	70.6	80.6
KG105	70	92	80	70.6	80.6
KG125, KG160	112	150	108	96	117
KG210, KG250, KG315	145	197.5	126	103	124

'H' dimension does not include the terminal covers. To obtain the dimension across the terminal cover(s) add the following to dimension 'H'.

KG80/100/105: add 26 mm on side that cover is fitted.
 KG125/160: add 22.5 mm on side that cover is fitted
 KG210/250/315: add 50 mm to 'H' dimension


Factory fitted auxiliary contacts are integral with the main switch body – they are not side mounting type.

Switch disconnectors


Base Mounting with Door Interlock

3, 3 + N & 4 Pole - plan view


KG10






KG20 to KG105



KG125 to KG315




Base Mounting Holes




6 Pole - plan view



KG20 to KG105



KG125 to KG160

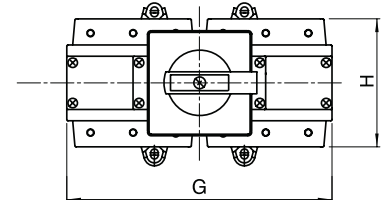

Base Mounting Holes



	D3	E	F	F1	F2	F3	F4	G 3 pole	G 3 pole+N	G 4 Pole	G 6 Pole	G1	H
KG10A & B	5	60	22	--	-	-	-	48	-	48	-	-	50
KG20A - & B, KG32A & B	5	60	22	32	10	10	32	42	55.5	55.5	84	-	54
KG41B, KG64B	5	70	25	37.5	12.5	12.5	37.5	50	66	66	100	-	64
KG80, KG100	6	90	25	47.5	22.5	22.5	47.5	70	92	92	140	12.2	80
KG105	6	90	25	-	-	-	-	70	92	92	140	12.2	80
KG125, KG160	6.4	120	36	76	-	-	-	112	-	150	224	-	108
KG210, KG250, KG315	6.4	142	44	-	-	-	-	145	-	197.5	-	-	126

'H' dimension does not include the terminal covers. To obtain the dimension across the terminal cover(s) add the following to dimension 'H'.

KG80/100/105: add 26 mm on side that cover is fitted.


KG125/160: add 22.5 mm on side that cover is fitted

KG210/250/315: add 50 mm to 'H' dimension


Factory fitted auxiliary contacts are integral with the main switch body – they are not side mounting type.

Note: Handle styles vary - see relevant catalogue section for handle style used.


Defeatable Door Interlock, Single Hole Fixing. 3 & 4 Pole Switches

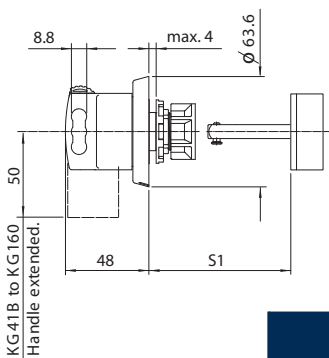

Door Interlock, Single Hole Fixing. 3, 3+N, 4 & 6 Pole KG10 to KG105

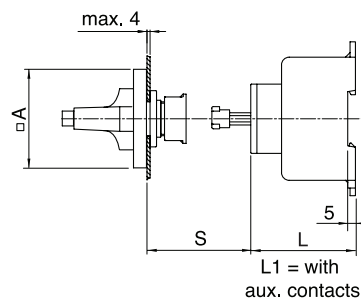

Handle Mounting Hole





	A	L1 3/4 Pole	L1 3/4 Pole	S	S1 3/4 Pole	L 6 Pole	L1 6 Pole	S 6 Pole
KG10A	48	49.2	58.7	30- 191	-	-	-	-
KG20A, KG32A	48	50	59	31-196	-	-	-	-
KG20B, KG32B	64	50	59	-	47-202mm	57.5	66.5	31-199
KG41B, KG64B	64	61	71	31-192	31-202mm	67	77	31-193
KG80, KG100, KG105	64	68	78	32-189	32-202mm	79.2	89.2	32-189
KG125, KG160	-	91	91	-	34-263mm	-	-	-

DIMENSIONS (MM)


KG Main/emergency-off switches

Base Mounting with Door Interlock, cont'd

Door Interlock, 4 Hole Fixing. 3, 4 & 6 Pole Switches - side view.

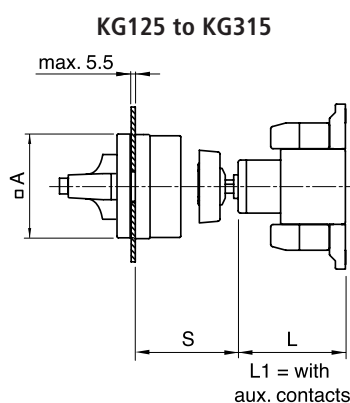
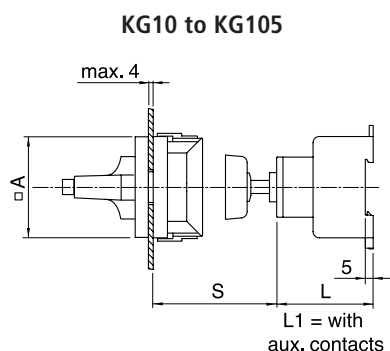


Handle Mounting Holes




	Shaft Length	A	B	D1	D2	L	L1	S	L	L1	S
KG10A	200	48	36	18-22	5	49.2	58.7	37-197	-	-	-
KG20A, KG32A	200	48	36	18-22	5	50	59	37-202	-	-	-
KG20B, KG32B	200	64	48	19-22	5	-	-	-	57.5	66.5	37-205
KG41B, KG64B	200	64	48	19-22	5	61	71	35-200	67	77	35-201
KG80, KG100, KG105	200	64	48	19-22	5	68	78	36-197	79.2	89.2	36-197
KG125, KG160	300	88	68	26-30	6	91	91	45-306	93	93	45-306
KG210, KG250, KG315	300	88	68	26-30	6	98	98	45-306	-	-	-

Defeatable Door Interlock, 4 Hole Fixing. 3, 4 & 6 Pole Switches - side view.

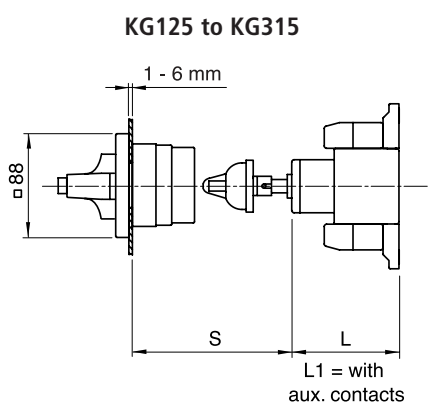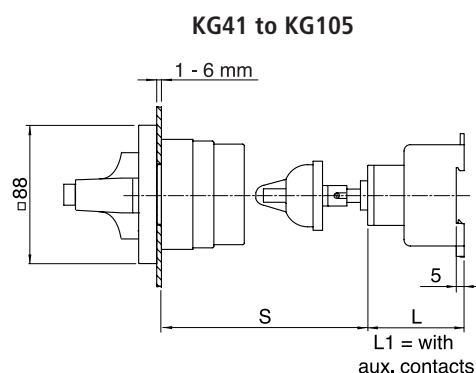

Handle Mounting Holes




	L 3/4 Pole	L1 3/4 Pole	S 3/4 Pole	L 6 Pole	L1 6 Pole	S 6 Pole
KG41B, KG64B	61	71	72-224	67	77	72-225
KG80, KG100, KG105	68	78	73-221	79.2	89.2	73-221
KG125, KG160	91	91	83-336	93	93	83-336
KG210, KG250, KG315	98	98	83-336	-	-	-


KG Changeover switches

Base Mounting with Door Interlock, 4 Hole Fixing


KG20 to KG105 - 3 & 4 Pole

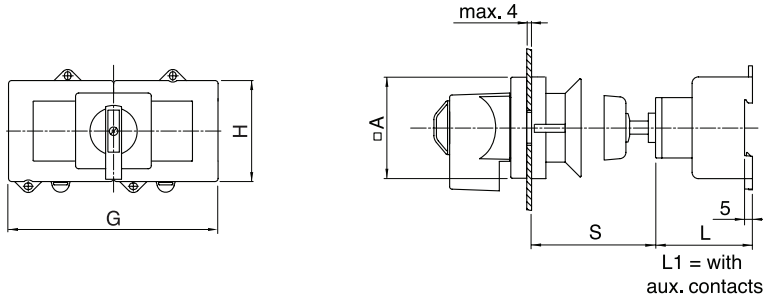


Base Mounting Holes



KG125 to KG160 - 3 & 4 Pole

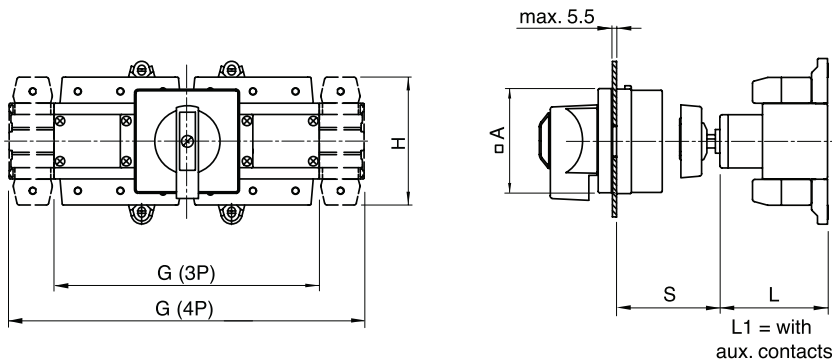


Base Mounting Holes



	A	B	D1	D2	D3	E	F1	F2	F3 3 Pole
KG20B, KG32B	64	48	19-22	5	5	60	32	10	10
KG41B, KG64B	64	48	19-22	5	5	70	37.5	12.5	12.5
KG80, KG100	88	48	19-22	5	6	90	47.5	22.5	22.5
KG105	88	48	19-22	5	6	90	47.5	22.5	-
KG125, KG160	88	68	26-30	6	6.4	120	76	-	-

Handle Mounting Holes




	F4 3 Pole	F3 4 Pole	F4 4 Pole	G 3 Pole	G 4 Pole	H	L	L1	S
KG20B, KG32B	32	23.5	45.5	84	111	54	57.5	66.5	37-125
KG41B, KG64B	37.5	28.5	53.5	100	132	64	67	77	35-131
KG80, KG100	47.5	44.5	69.5	140	184	80	79.2	89.2	36-127
KG105	-	44.5	69.5	140	184	80	79.2	89.2	36-127
KG125, KG160	-	-	-	224	300	108	93	93	45-196

Factory fitted auxiliary contacts are integral with the main switch body – they are not side mounting type.

DIMENSIONS (MM)

KG Changeover switches


Base Mounting - For 45mm Installation Cut-Out

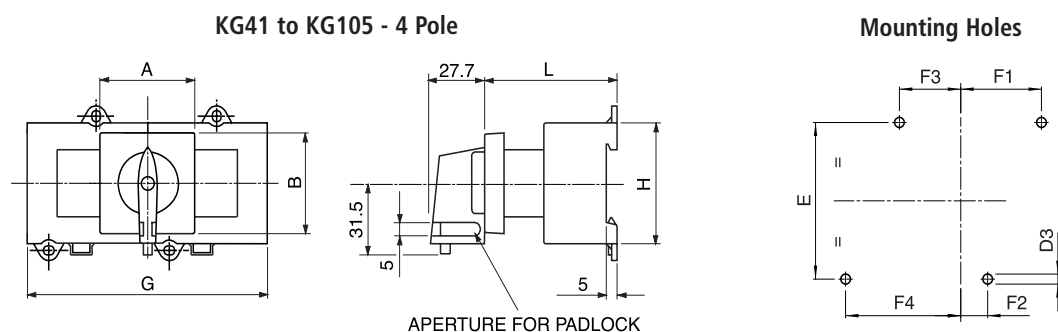

	A	B	D3	E	F1	F2	F3	F4	G	H	L
KG41B, KG64B	105.4	45.4	5	70	37.5	12.5	28.5	53.5	132	64	67.5
KG80, KG100, KG105	70	45	6	90	47.5	22.5	44.5	69.5	184	80	81.2


KG Switch options

Side Mounting Modules




Terminal Covers

KG10 to KG105



KG125 to KG315




	G1	G2
KG20A & B, KG32A & B	10	13.5
KG41B, KG64B	11	16
KG80, KG100, KG105	11	22
KG125, KG160	14	38
KG210, KG250, KG315	14	52.5

	H1
KG10A & B	32
KG20A & B, KG32A & B	47
KG41B, KG64B	49
KG80, KG100, KG105	66
KG125, KG160	76.2
KG210, KG250, KG315	88

Note:
KG125 to KG315 4 pole switches cannot have additional modules fitted on the side adjacent to the 4th pole (switched neutral).

KH Changeover switches


Base Mounting with Door Interlock, 4 Hole Fixing

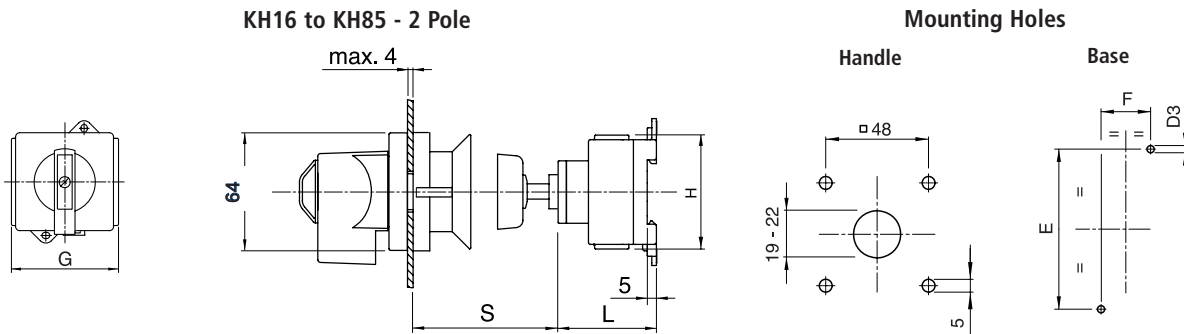

'H' dimension for KH63/80/85 does not include the terminal cover.
To obtain the dimension across the terminal cover(s) add 23.5 mm
on side that cover is fitted.

	D3	E	F	G	H	L	S
KH16, KH20, KH25	5	60	22	60	56	47	37-122
KH32, KH40	5	70	25	70	62	53.5	39-132
KH63, KH80, KH85	6	90	25	86	90	59.5	39-132


Base Mounting - For 45mm Installation Cut-out

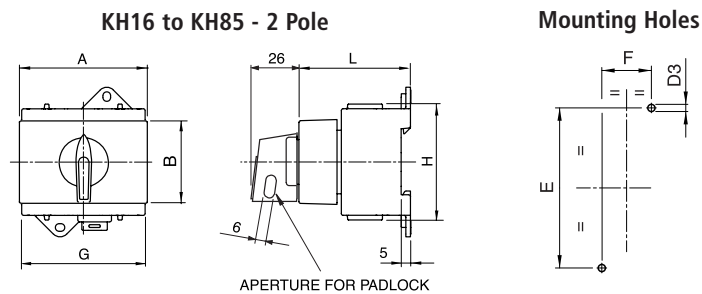

	A	B	D3	E	F	G	H	L
KH16, KH20, KH25	43.7	45.4	5	60	22	60	56	58.5
KH32, KH40	70.4	45.4	5	70	25	70	62	59.7
KH63, KH80, KH85	70.4	45.4	5	90	25	86	90	66.7

KH Switch options

Terminal Covers



	H1
KH32, KH40	45
KH63, KH80, KH85	68.5

Short form

